



## TOUCH TRIGGER DATA SHEET

### PRODUCT OVERVIEW

The TX10 LED Touch Trigger has eight independent buttons, allowing you to trigger light effects using DMX, as well as a dimming slider and On/Off button. It is simple and affordable, making it an excellent choice for budget installations where triggering up to 8 effects is all that is needed.

The TX10 should be used in conjunction with either an LED CTRL PX or MX device. The PX/MX should be configured to have effects stored on an SD card which can then be triggered from the TX via the AUX port on the PX/MX.

Refer to the TX10 Quick Start Guide for set-up information.

### KEY FEATURES

- MULTI-ZONE CONTROL - UP TO 8 DIFFERENT ZONES/EFFECTS
- EASY INSTALLATION AND INTEGRATION
- SIMPLE OPERATION
- LONG LIFESPAN
- AFFORDABLE PRICE




## SPECIFICATIONS

Input Voltage	DC12V - DC24V
Operating Temperature Range	-30°C to 50°C
Dimensions	85.5 x 85.5 x 15mm (L x W x H)
Certifications	CE
Housing Colour	Black/White/Grey
Housing Material	Aluminium
Environment	Indoor
IP Rating	IP20
Functions	Scene select, Dimmer, On/Off
Control	DMX
Zones	8
Number of Channels	9
Product Type	DMX Trigger Panel
Power Supply Mounting	External
Mounting	Built-in

The TX10 is compatible with the PX24 and MX96 when used with a SD card to trigger saved scenes or initiate effects through LED CTRL via a DMX to Artnet device.

## OVERALL DIMENSIONS

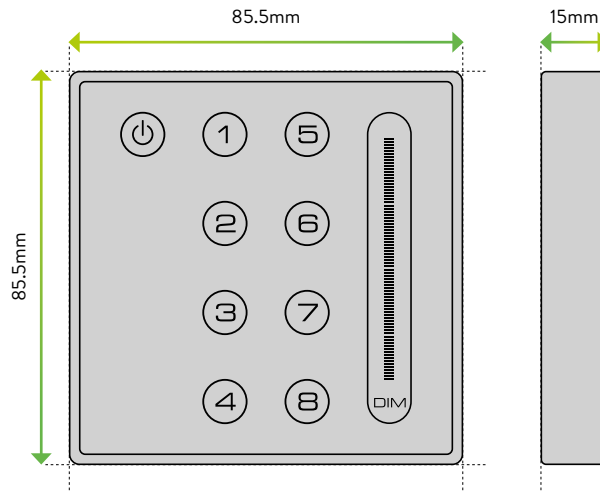

## WIRING DIAGRAM

