




Serrated Aluminium Profile

DATASHEET SPECIFICATIONS





Dimensions: mm

Item Code	Standard Length	L1	L2	Slotted Hole	Hole Number
FXN – 1010 – SA/PL – 20MM – AL	20mm/0.787in	10mm/0.39in	/	4*10mm/0.16*0.39in	1
FXN – 1010 – SA/PL – 500MM – AL	500mm/19.68in	50mm/1.97in	200mm/7.87in	4*10mm/0.16*0.39in	3
FXN – 1010 – SA/PL – 1000MM – AL	1000mm/39.37in	100mm/3.93in	200mm/7.87in	4*10mm/0.16*0.39in	5
FXN – 1010 – SA/PL – 2000MM – AL	2000mm/78.74in	100mm/3.93in	200mm/7.87in	4*10mm/0.16*0.39in	10



Tolerance: ±0.3mm

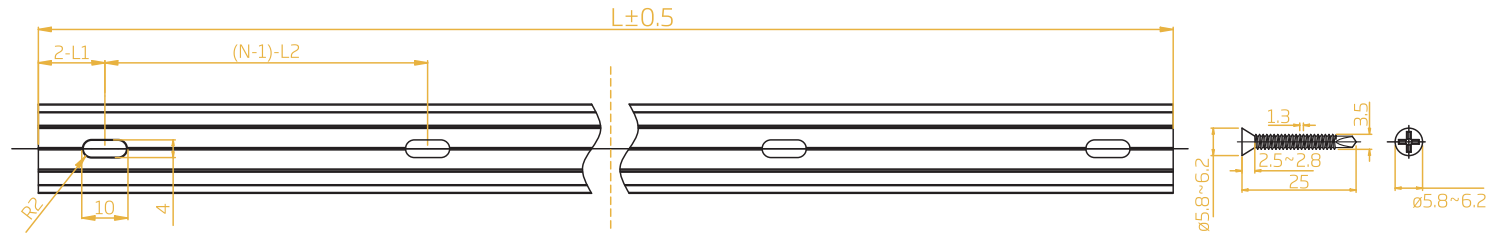

Note:  
1. 2-L1 refers to two of symmetric L1 in each piece of profile.  
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile.  
"N" hereby stands for its corresponding "Hole Number" in the below table.



WWW.LEDCTRL.COM

LED CTRL, 1/483 BALMAIN  
LILYFIELD, NSW 2040, AUSTRALIA

SPECIFICATIONS SUBJECT TO CHANGE  
WITHOUT NOTICE. VISIT [WWW.LEDCTRL.COM](http://WWW.LEDCTRL.COM)  
FOR THE MOST CURRENT SPECIFICATIONS.  
LED CONTROL PTE LTD UEN 201923077G  
© 2025 LEDCTRL. ALL RIGHTS RESERVED.