


Dual Injection-moulded Front Connector-End



FXN - 1617 - C - DIM- FE




Dual Injection-moulded Middle Connector & Power T-feed



FXN - 1617 - C - DIM - TF


L1 and L2 available in 300mm.
L3 available in 300mm/1000mm/3000mm.

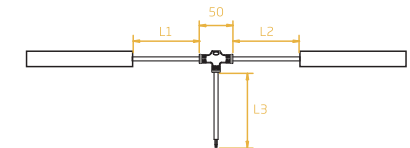


Dual Injection-moulded Front Connector-Side



FXN - 1617 - C - DIM - FS




Anti-wicking Ferrule



The anti-wicking ferrule is located at 115mm (±10mm tolerance) from the connector on the cable.

For protection against water ingress from inside of cable wire and hence damage the light.

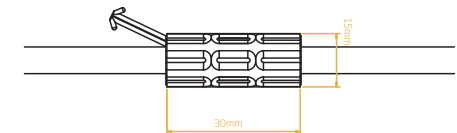


Note:

1. Unless otherwise stated, the tolerance is ±0.5mm.
2. The removal of anti-wicking ferrule will void the warranty if any water ingress caused by it.

Dual Injection-moulded Front Connector-Bottom



FXN - 1617 - C - DIM - FB



Dual Injection-moulded End Cap



FXN - 1617 - C - DIM - EC

