


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R	WEIGHT:0.490KG/M
DIM.: 11.5*29mm	SPEC.:
MFR.:	SUR.:16*1000mm
	PROTECTION ANGLE:/

DATA OF LAMP		PHOTOMETRIC DATA Eff: 13.25 lm/W			
MODEL	5050	Imax(cd)	15.28	S/MH(C0/180)	1.22
NOMINAL POWER(W)	4.71	LOR(%)	104.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	62.387	η UP,DN(C0-180)	7.3,42.1
NOMINAL FLUX(lm)	60	CIE CLASS	SEMI-D.	η UP,DN(C180-360)	8.2,46.4
LAMPS INSIDE	1	η up(%)	15.5	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	η down(%)	88.5	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

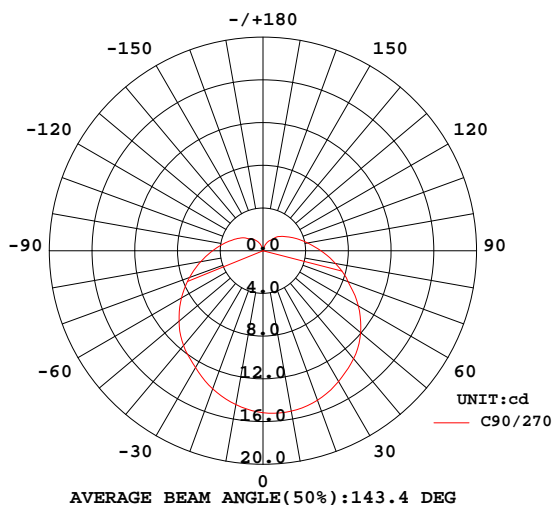

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

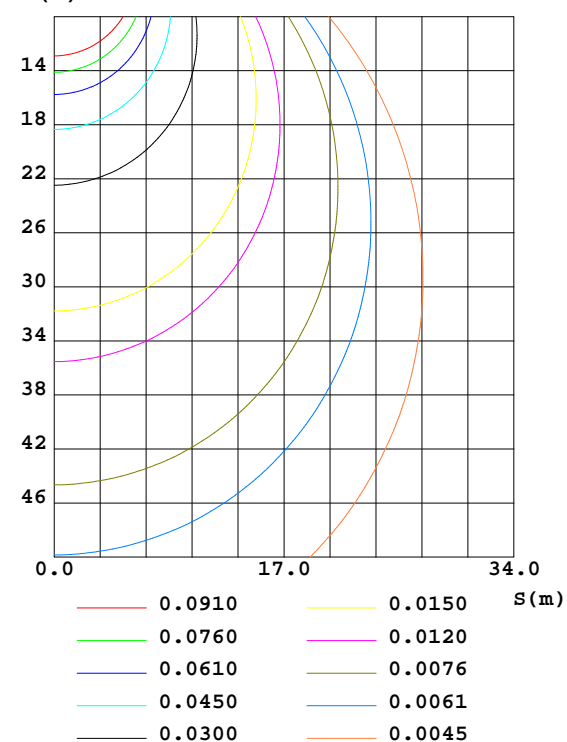

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\%lum, lamp$
10	14.82	14.62	14.63	14.75	14.91	15.18	15.25	15.05	0- 10	1.435	1.435	2.3,2.39
20	13.86	13.64	13.77	13.85	14.04	14.67	14.90	14.43	10- 20	4.117	5.551	8.9,9.25
30	12.37	12.31	12.63	12.58	12.62	13.67	14.14	13.33	20- 30	6.271	11.82	19,19.7
40	10.48	10.83	11.58	11.13	10.80	12.29	13.20	11.91	30- 40	7.682	19.51	31.3,32.5
50	8.328	9.247	10.26	9.565	8.683	10.73	11.94	10.32	40- 50	8.299	27.80	44.6,46.3
60	6.077	7.609	8.809	7.954	6.443	8.983	10.31	8.555	50- 60	8.092	35.90	57.5,59.8
70	3.808	5.965	7.330	6.326	4.187	7.181	8.480	6.726	60- 70	7.186	43.08	69.1,71.8
80	1.554	4.445	5.920	4.787	1.899	5.440	6.903	5.014	70- 80	5.795	48.88	78.3,81.5
90	0.0002	3.267	4.728	3.369	0	3.970	5.427	3.621	80- 90	4.228	53.10	85.1,88.5
100	0	2.472	3.784	2.321	0	2.642	4.239	2.704	90-100	3.042	56.15	90,93.6
110	0	1.942	3.010	1.702	0	1.941	3.346	2.116	100-110	2.190	58.34	93.5,97.2
120	0	1.544	2.409	1.267	0	1.360	2.627	1.720	110-120	1.587	59.92	96.1,99.9
130	0	1.211	1.767	0.8340	0	0.9619	2.094	1.415	120-130	1.110	61.03	97.8,102
140	0	0.9106	1.412	0.5094	0	0.5723	1.466	1.115	130-140	0.7039	61.74	99,103
150	0	0.6058	1.004	0.2799	0	0.3642	1.037	0.8283	140-150	0.4009	62.14	99.6,104
160	0.0053	0.3419	0.5369	0.1412	0.0239	0.2384	0.5754	0.5448	150-160	0.1911	62.33	99.9,104
170	0.0238	0.0824	0	0.0435	0.0583	0.1643	0.0001	0.1990	160-170	0.0523	62.38	100,104
180	0.0636	0.0239	0	0	0.0741	0.0252	0	0	170-180	0.0047	62.39	100,104
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R	WEIGHT:0.490KG/M
DIM.: 11.5*29mm	SPEC.:
MFR.:	SUR.:16*1000mm
	PROTECTION ANGLE:/

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.20	1.20	1.20	1.16	1.16	1.16	1.07	1.07	1.07	.99	.99	.99	.92	.92	.92	.89
1.0	1.01	.95	.90	.97	.92	.87	.89	.85	.82	.83	.79	.77	.76	.74	.72	.68
2.0	.86	.78	.72	.83	.76	.69	.77	.71	.65	.71	.66	.62	.66	.62	.58	.55
3.0	.75	.66	.58	.72	.64	.57	.67	.60	.54	.62	.56	.51	.57	.52	.48	.45
4.0	.66	.56	.49	.64	.55	.48	.59	.51	.45	.55	.48	.43	.51	.45	.41	.38
5.0	.59	.49	.42	.57	.47	.41	.53	.45	.39	.49	.42	.37	.45	.40	.35	.32
6.0	.53	.43	.36	.51	.42	.35	.47	.39	.34	.44	.37	.32	.41	.35	.31	.28
7.0	.47	.38	.31	.46	.37	.31	.43	.35	.30	.40	.33	.28	.37	.31	.27	.25
8.0	.43	.34	.28	.42	.33	.27	.39	.32	.26	.37	.30	.25	.34	.28	.24	.22
9.0	.39	.31	.25	.38	.30	.24	.36	.29	.23	.34	.27	.23	.32	.26	.22	.20
10.0	.36	.28	.22	.35	.27	.22	.33	.26	.21	.31	.25	.20	.29	.24	.20	.18

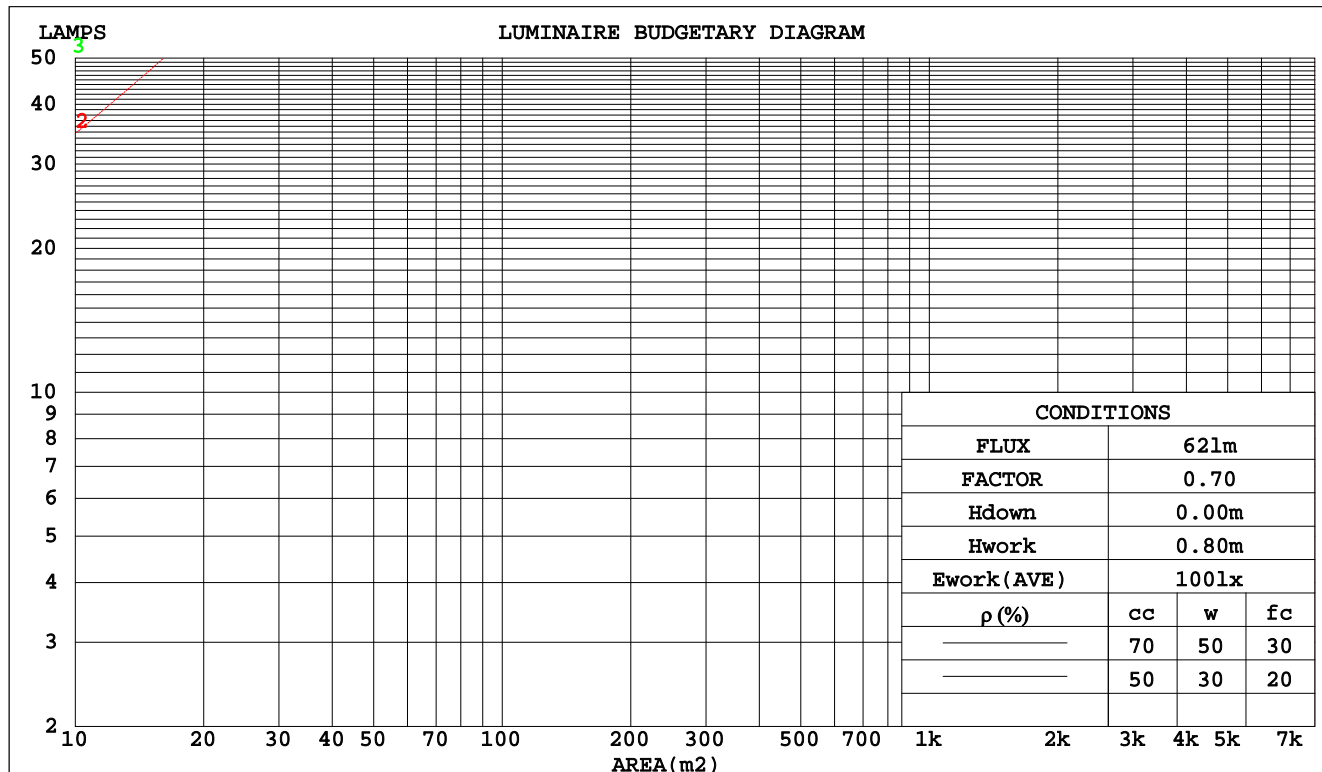

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R	WEIGHT:0.490KG/M
DIM.: 11.5*29mm	SPEC.: SERIAL No.:
MFR.:	SUR.:16*1000mm PROTECTION ANGLE: /

pcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.391	.222	.070	.379	.216	.069	.356	.204	.065	.335	.193	.062	.315	.183	.059		
2.0	.341	.187	.057	.330	.182	.056	.310	.172	.053	.291	.163	.051	.273	.154	.049		
3.0	.305	.162	.049	.295	.158	.048	.276	.150	.045	.259	.142	.044	.243	.134	.042		
4.0	.275	.143	.042	.266	.139	.041	.249	.132	.039	.234	.125	.038	.219	.119	.036		
5.0	.250	.128	.037	.242	.124	.036	.227	.118	.035	.213	.112	.033	.200	.107	.032		
6.0	.230	.115	.033	.222	.112	.032	.209	.107	.031	.196	.102	.030	.183	.097	.029		
7.0	.212	.105	.030	.205	.102	.029	.193	.097	.028	.181	.093	.027	.170	.088	.026		
8.0	.197	.096	.027	.191	.094	.027	.179	.090	.026	.168	.085	.025	.158	.081	.024		
9.0	.184	.089	.025	.178	.087	.024	.167	.083	.023	.157	.079	.023	.148	.075	.022		
10.0	.172	.082	.023	.167	.081	.022	.157	.077	.022	.148	.073	.021	.139	.070	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.316	.316	.316	.270	.270	.270	.184	.184	.184	.106	.106	.106	.034	.034	.034	
1.0	.311	.281	.253	.266	.241	.218	.182	.166	.151	.105	.096	.088	.034	.031	.028	
2.0	.304	.257	.217	.260	.221	.188	.178	.153	.131	.103	.089	.077	.033	.029	.025	
3.0	.296	.239	.194	.254	.206	.168	.174	.143	.118	.101	.084	.070	.032	.027	.023	
4.0	.288	.226	.179	.247	.195	.156	.170	.136	.110	.098	.080	.065	.032	.026	.021	
5.0	.280	.216	.169	.240	.187	.147	.166	.130	.104	.096	.077	.061	.031	.025	.020	
6.0	.272	.208	.161	.234	.180	.140	.161	.126	.099	.094	.074	.059	.030	.024	.019	
7.0	.265	.201	.156	.228	.174	.136	.157	.122	.096	.091	.072	.057	.030	.024	.019	
8.0	.258	.195	.151	.222	.169	.132	.154	.119	.094	.089	.070	.056	.029	.023	.018	
9.0	.251	.190	.148	.216	.165	.129	.150	.116	.092	.087	.068	.055	.028	.022	.018	
10.0	.245	.185	.146	.211	.161	.127	.147	.113	.090	.086	.067	.054	.028	.022	.018	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

Uncorrected UGR Table

NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R						WEIGHT:0.490KG/M				
DIM.: 11.5*29mm						SPEC.:		SERIAL No.:		
MFR.:						SUR.:16*1000mm			PROTECTION ANGLE:/	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions						Viewed crosswise				
x = 2H y = 2H						Viewed endwise				
3H						12.1	13.5	12.5	13.9	14.4
4H						14.5	15.8	15.0	16.3	16.8
6H						15.8	17.1	16.3	17.6	18.1
8H						17.3	18.4	17.8	19.0	19.6
12H						18.1	19.2	18.6	19.8	20.4
12H						19.0	20.1	19.6	20.7	21.3
4H 2H						12.7	13.9	13.2	14.4	15.0
3H						15.3	16.4	15.9	17.0	17.6
4H						16.8	17.8	17.4	18.4	19.1
6H						18.5	19.4	19.1	20.0	20.7
8H						19.4	20.3	20.1	20.9	21.6
12H						20.5	21.3	21.2	21.9	22.6
8H 4H						17.2	18.0	17.8	18.6	19.3
6H						19.2	19.9	19.8	20.5	21.3
8H						20.3	20.9	21.0	21.6	22.4
12H						21.6	22.2	22.3	22.9	23.7
12H 4H						17.2	18.0	17.9	18.6	19.3
6H						19.3	19.9	20.0	20.6	21.4
8H						20.5	21.1	21.2	21.8	22.6
Variations with the observer position at spacings:										
S = 1.0H		+ 0.1 / - 0.1				+ 0.1 / - 0.1				
1.5H		+ 0.2 / - 0.3				+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.4				+ 0.2 / - 0.3				

CIE Pub.117 Corrected 60.00 lm Total Lamp Luminous Flux.(8log(F/F0) = -9.8)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R	WEIGHT:0.490KG/M
DIM.: 11.5*29mm	SERIAL No.:
MFR.:	PROTECTION ANGLE:/


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	31	50	38	31	48	37	30	23
0.80	61	48	39	59	47	39	57	46	38	30
1.00	69	56	47	67	55	47	64	56	46	37
1.25	76	63	55	74	62	54	70	60	52	43
1.50	82	69	60	79	68	60	74	65	58	47
2.00	89	78	70	86	76	68	81	72	65	54
2.50	94	83	75	90	81	74	84	77	70	58
3.00	97	88	81	94	86	79	87	81	75	62
4.00	102	94	88	98	91	85	92	86	81	67
5.00	105	98	92	101	95	90	94	89	85	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHR _{NOM} = 1.25										

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R	WEIGHT:0.490KG/M
DIM.: 11.5*29mm	SERIAL No.:
MFR.:	PROTECTION ANGLE:/
SPEC.:	SUR.:16*1000mm

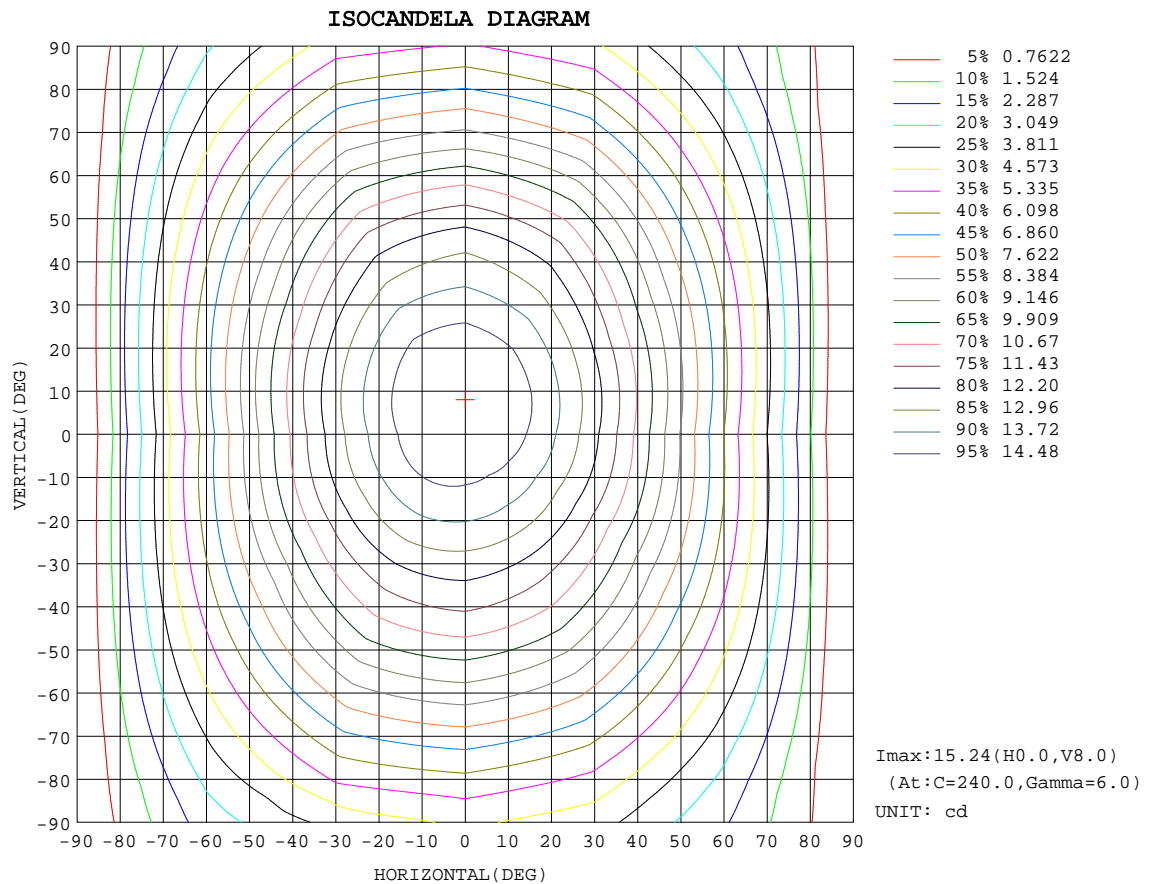


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

AAI Figure

NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R	5050-1M-R	WEIGHT:0.490KG/M
DIM.: 11.5*29mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:16*1000mm	PROTECTION ANGLE:/

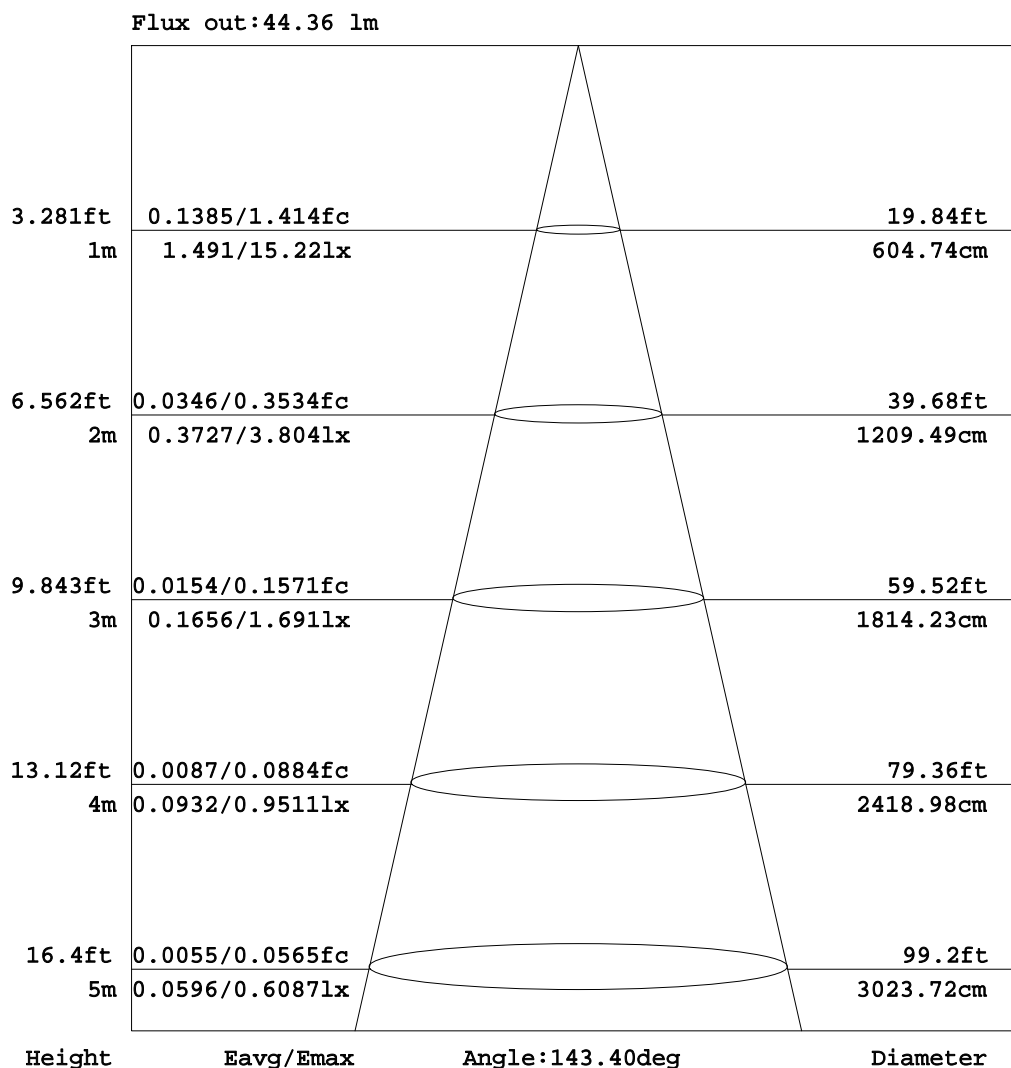


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R	WEIGHT:0.490KG/M
DIM.: 11.5*29mm	SPEC.:
MFR.:	SUR.:16*1000mm
	PROTECTION ANGLE:/

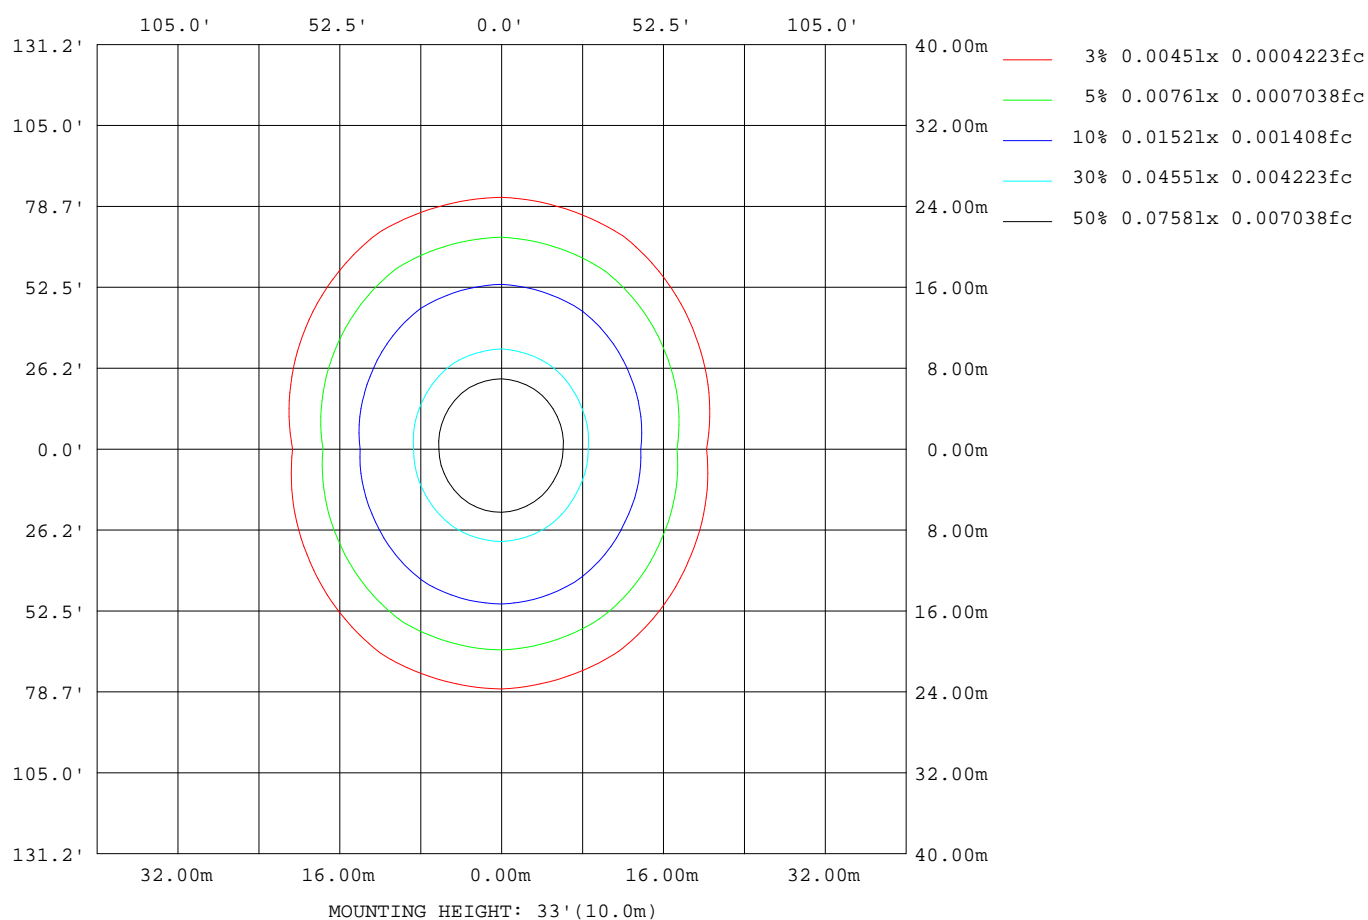

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

Average Luminance Table(CIBSE)

NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R	WEIGHT:0.490KG/M
DIM.: 11.5*29mm	SERIAL No.:
MFR.:	PROTECTION ANGLE:/

Parameter description for average Luminance	Symbol	Value	Unit
Luminance in Azimuth Plane	Bc	refer Table 2	cd/sq.m.
Intensity at angle Gamma in given azimuth plane	I	from data	cd/klm
Number of lamps	N	1	
Output of each lamp(initial lumens as specified)	F	60	lm
Multiplying factor	K	1	
Luminous area in horizontal plane used in calculations	A	0.016	sq.m.
Angle to the downward vertical from light centre	Gamma	from data	deg

Table 1. Calculation parameters for determination of CIBSE LG3:1996 Average Luminance

G	C plane(deg)																		
deg	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
55	785	800	822	852	897	943	986	1013	1031	1040	1043	1037	1020	979	932	887	851	828	824
60	760	789	825	868	925	982	1034	1067	1089	1101	1105	1097	1076	1027	971	913	859	820	805
65	731	780	835	896	971	1044	1110	1152	1179	1193	1197	1187	1159	1099	1027	953	874	813	786
70	696	775	859	946	1049	1147	1234	1288	1323	1339	1345	1330	1294	1215	1120	1019	902	810	765
75	650	781	914	1047	1194	1333	1452	1527	1574	1596	1603	1582	1530	1423	1290	1145	963	815	735
80	559	812	1054	1285	1521	1735	1915	2029	2099	2131	2140	2106	2024	1860	1655	1422	1104	836	683
85	339	971	1551	2081	2580	3013	3365	3600	3741	3792	3756	3633	3427	3135	2766	2321	1593	954	569

Table 2. Average Luminance(cd/sq.m.) for defined C plane,Gamma angle

CIBSE Category	Gamma (deg)	Average Luminance		Patch Luminance	
		maximum calculated	specified maximum	maximum measured	specified maximum
Category 1	55 to 90	3792	200	---	500
Category 2	65 to 90	3792	200	---	500
Category 3	75 to 90	3792	200	---	500

Table 3. Tabulation of Average and Patch Luminance(cd/sq.m.) for defined CIBSE categories

No match

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: C-SFR-F21S-HB-D24CV-RGBW(2700K)-56-5050-1M-R	WEIGHT:0.490KG/M
DIM.: 11.5*29mm	SERIAL No.:
MFR.:	PROTECTION ANGLE:/
SUR.:16*1000mm	

Table--1

UNIT: cd

C(DEC)	0	30	60	90	120	150	180	210	240	270	300	330							
γ (DEC)																			
0	15.2	15.2	15.2	15.2	15.2	15.2	15.2	15.2	15.2	15.2	15.2	15.2							
5	15.1	15.0	15.0	15.0	15.0	15.1	15.1	15.2	15.3	15.3	15.2	15.1							
10	14.8	14.7	14.6	14.6	14.7	14.8	14.9	15.1	15.3	15.3	15.1	15.0							
15	14.5	14.3	14.3	14.3	14.4	14.5	14.6	14.9	15.2	15.2	15.0	14.7							
20	13.9	13.6	13.7	13.8	13.8	13.9	14.0	14.5	14.9	14.9	14.6	14.2							
25	13.3	13.1	13.2	13.3	13.4	13.4	13.5	14.1	14.6	14.6	14.3	13.8							
30	12.4	12.2	12.4	12.6	12.7	12.5	12.6	13.3	14.0	14.1	13.7	12.9							
35	11.7	11.5	11.9	12.2	12.1	11.9	11.9	12.7	13.6	13.8	13.3	12.3							
40	10.5	10.5	11.2	11.6	11.4	10.9	10.8	11.7	12.9	13.2	12.5	11.3							
45	9.64	9.77	10.7	11.1	10.9	10.1	9.98	11.0	12.4	12.8	12.0	10.6							
50	8.33	8.68	9.81	10.3	10.1	9.02	8.68	9.89	11.6	11.9	11.2	9.44							
55	7.43	7.99	9.20	9.69	9.51	8.30	7.79	9.14	10.9	11.3	10.5	8.70							
60	6.08	6.94	8.27	8.81	8.60	7.30	6.44	8.05	9.92	10.3	9.50	7.61							
65	5.17	6.23	7.66	8.22	7.98	6.62	5.54	7.32	9.22	9.59	8.81	6.85							
70	3.81	5.18	6.75	7.33	7.08	5.57	4.19	6.20	8.16	8.48	7.76	5.69							
75	2.91	4.50	6.16	6.75	6.48	4.91	3.27	5.45	7.48	7.88	7.08	4.93							
80	1.55	3.57	5.32	5.92	5.62	3.95	1.90	4.40	6.48	6.90	6.12	3.91							
85	0.68	3.03	4.81	5.41	4.97	3.37	1.01	3.77	5.86	6.29	5.51	3.29							
90	0.00	2.38	4.15	4.73	4.09	2.65	0.00	2.94	5.00	5.43	4.70	2.55							
95	0.00	2.06	3.77	4.32	3.74	2.29	0.00	2.51	4.45	4.91	4.23	2.18							
100	0.00	1.69	3.25	3.78	2.93	1.71	0.00	1.79	3.50	4.24	3.62	1.79							
105	0.00	1.51	2.95	3.45	2.58	1.48	0.00	1.68	2.96	3.86	3.28	1.61							
110	0.00	1.32	2.57	3.01	2.14	1.26	0.00	1.47	2.41	3.35	2.84	1.39							
115	0.00	1.21	2.34	2.76	2.04	1.05	0.00	1.23	2.07	3.04	2.60	1.29							
120	0.00	1.06	2.03	2.41	1.70	0.84	0.00	0.93	1.79	2.63	2.28	1.16							
125	0.00	0.97	1.85	2.18	1.51	0.69	0.00	0.80	1.70	2.40	2.09	1.09							
130	0.00	0.83	1.60	1.77	1.16	0.51	0.00	0.64	1.29	2.09	1.84	0.99							
135	0.00	0.73	1.44	1.61	0.97	0.41	0.00	0.50	1.07	1.90	1.69	0.89							
140	0.00	0.61	1.21	1.41	0.73	0.29	0.00	0.35	0.79	1.47	1.48	0.75							
145	0.00	0.53	1.05	1.26	0.60	0.23	0.00	0.30	0.66	1.23	1.35	0.68							
150	0.00	0.39	0.82	1.00	0.37	0.19	0.00	0.29	0.44	1.04	1.10	0.56							
155	0.00	0.32	0.68	0.82	0.24	0.18	0.00	0.29	0.30	0.84	0.93	0.49							
160	0.01	0.20	0.48	0.54	0.13	0.15	0.02	0.28	0.20	0.58	0.74	0.35							
165	0.01	0.12	0.35	0.06	0.08	0.12	0.04	0.25	0.16	0.12	0.59	0.25							
170	0.02	0.02	0.14	0.00	0.04	0.05	0.06	0.17	0.16	0.00	0.32	0.08							
175	0.04	0.01	0.02	0.00	0.00	0.01	0.06	0.11	0.09	0.00	0.11	0.03							
180	0.06	0.05	0.00	0.00	0.00	0.00	0.07	0.05	0.01	0.00	0.00	0.00							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-09-12

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks: