

Colorimetric Parameters

Chromaticity Coordinate: $x=0.6947$ $y=0.3049$ $u'=0.5274$ $v'=0.5208$

CCT=1001K (Duv=-0.0798) Dominant WL:Ld =621.8nm Purity=99.9%

Peak WL:Lp=631.8nm FWHM=17.9nm

Render Index:Ra=27.3 Render Index:AvgR =30.6

R1 =8 R2 =78 R3 =32 R4 =0 R5 =3 R6 =89 R7 =8

R8 =0 R9 =0 R10=72 R11=0 R12=79 R13=30 R14=60 R15=0

Photometric & Radiometric Parameters

Flux=136.2 lm Eff.:19.65 lm/W Fe=692.5 mW

Electrical parameters

V=24 V I=0.2871 A P=6.89 W PF=1.000 F=0.00 Hz

Status: Integral T = 118 ms Ip = 48180 (74%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F22S-VB-D24CC-RGB-84-5050-1M-R

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-20 18:49:51

Humidity:63.0%

Remarks:

Standard:

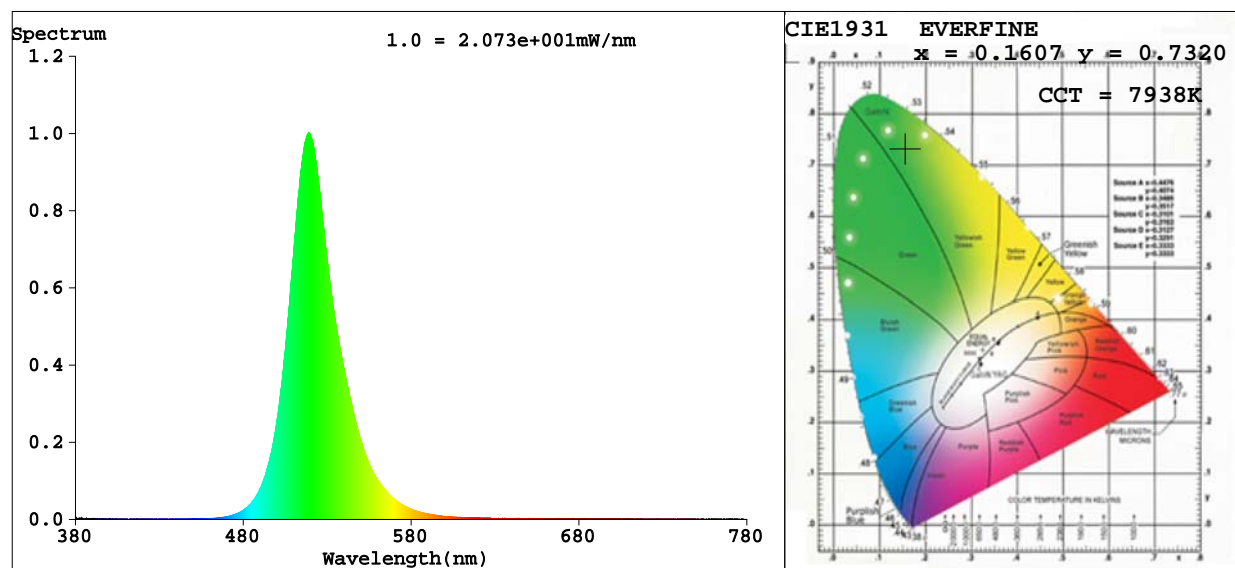

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1607$ $y=0.7320$ $u'=0.0561$ $v'=0.5747$

CCT=7938K (Duv=0.1609) Dominant WL:Ld =525.9nm Purity=81.4%

Peak WL:Lp=518.9nm FWHM=29.1nm

Render Index:Ra=0.0 Render Index:AvgR =2.4

R1 =0	R2 =0	R3 =0	R4 =0	R5 =0	R6 =0	R7 =0	
R8 =0	R9 =0	R10=0	R11=0	R12=0	R13=0	R14=36	R15=0

Photometric & Radiometric Parameters

Flux=354.7 lm Eff.:51.27 lm/W Fe=735.0 mW

Electrical parameters

V=24 V I=0.2865 A P=6.88 W PF=1.000 F=0.00 Hz

Status: Integral T = 198 ms Ip = 52607 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F22S-VB-D24CC-RGB-84-5050-1M-G

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-20 18:56:22

Humidity:63.0%

Remarks:

Standard:

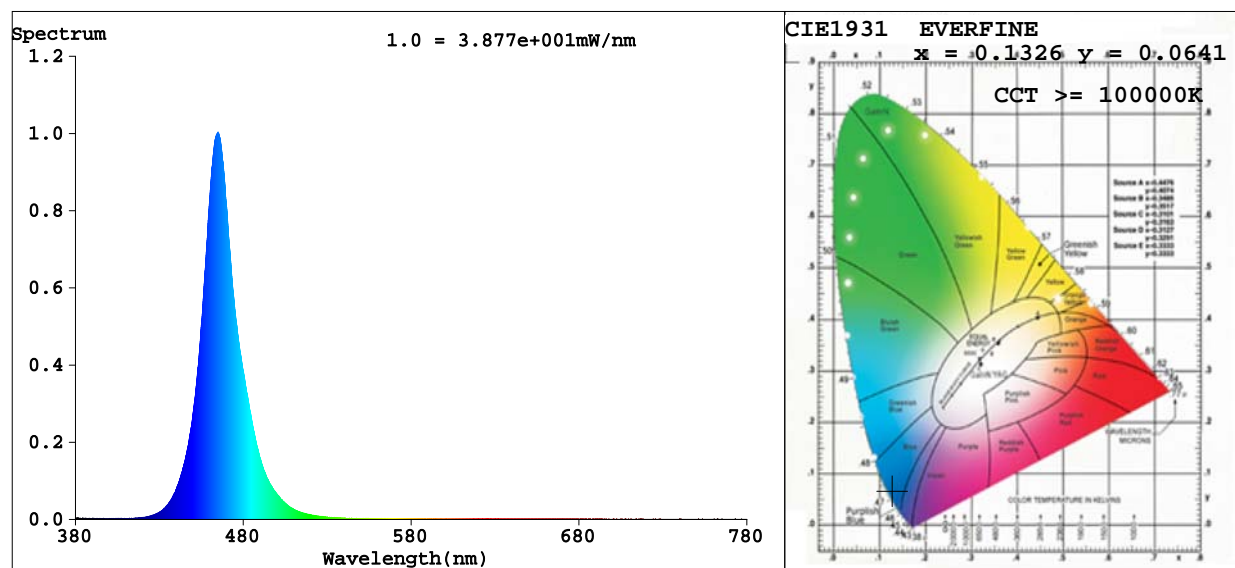

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1326$ $y=0.0641$ $u'=0.1513$ $v'=0.1645$

CCT=100000K (Duv=0.1590) Dominant WL: $\lambda_d = 469.4\text{nm}$ Purity=96.7%

Peak WL: $\lambda_p = 464.8\text{nm}$ FWHM=21.1nm

Render Index: $R_a = 0.2$ Render Index: AvgR = 0.1

R1 = 0 R2 = 0 R3 = 0 R4 = 0 R5 = 1 R6 = 0 R7 = 0

R8 = 0 R9 = 0 R10 = 0 R11 = 0 R12 = 0 R13 = 0 R14 = 0 R15 = 0

Photometric & Radiometric Parameters

Flux=73.19 lm Eff.: 10.55 lm/W $\Phi_e = 1.036\text{ W}$

Electrical parameters

V=24 V I=0.2873 A P=6.9 W PF=1.000 F=0.00 Hz

Status: Integral T = 150 ms $I_p = 52318$ (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model: C-SFR-F22S-VB-D24CC-RGB-84-5050-1M-B

Test By: SHAN

Temperature: 25.3Deg

Manufacturer:


Assessor:

Date: 2018-08-20 18:57:03

Humidity: 63.0%

Remarks:

Standard:

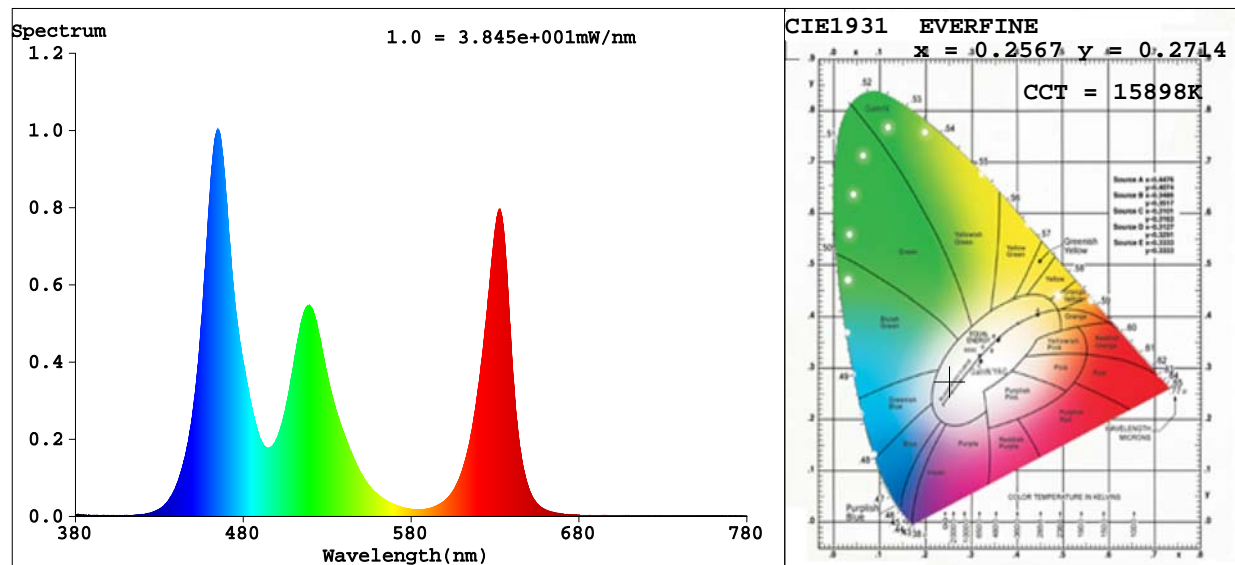

Colorimetric Parameters

Chromaticity Coordinate: $x=0.2567$ $y=0.2714$ $u'=0.1788$ $v'=0.4253$

CCT=15898K(Duv=0.0069) Dominant WL:Ld =480.3nm Purity=31.5%

Peak WL:Lp=465.2nm FWHM=21.3nm

Render Index:Ra=43.9 Render Index:AvgR =37.3

R1 =25 R2 =56 R3 =72 R4 =45 R5 =47 R6 =53 R7 =53

R8 =0 R9 =0 R10=0 R11=35 R12=59 R13=29 R14=80 R15=5

Photometric & Radiometric Parameters

Flux=554.8 lm Eff.:32.34 lm/W Fe=2.432 W

Electrical parameters

V=24 V I=0.7104 A P=17.05 W PF=1.000 F=0.00 Hz

Status: Integral T = 150 ms Ip = 58372 (89%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F22S-VB-D24CC-RGB-84-5050-1M-RGB

Test By:SHAN

Temperature:25.3Deg

Manufacturer:

Assessor:

Date:2018-08-20 18:57:26

Humidity:63.0%

Remarks:

Standard: