


BXS 10 | SPOTLIGHT SERIES RANGE

The BXS 10 is a compact, high-performance LED spotlight from the BX Beam range, designed for precision lighting in architectural, landscape, and public space applications.

With versatile colour options, precision optics, and multiple control protocols, it offers flexibility for both functional and decorative use.

Housed in anodised aluminium and rated IP66 and IK07 impact protection, the BXS 10 is built for durability and long-term outdoor performance. Custom accessories are available to suit specific project needs.



PART NUMBER CONFIGURATOR

Prefix	Model	LED Colour	White CCT	Control	Beam Angle	Voltage	Snoot Options	Housing Colour	Mount
BXS	10	RGBW RGBA RGB DW – Dynamic White (20K – 50K) W – White (24K – 60K)	24K – 2400K 27K – 2700K 30K – 3000K 35K – 3500K 40K – 4000K 50K – 5000K 60K – 6000K	S – SPI D – DMX P – PWM DA – DALI X-X-Stream	10 – 10° 25 – 25° 40 – 40° 2.4 – 20°x40° 1.3 – 10°x35° 1.6 – 10°x60° 3.6 – 30°x60°	24 – 24V DC	FS – Full Snoot HS – Half Snoot N – None	B – Black G – Grey R – Red C – Custom RAL	B – Hook-on Bracket LS – Landscape Spike

Example: BXS – 10 – RGBW – 24K – D – 2.4 – 24 – FS – B – LS


SPECIFICATIONS

Electrical	Power Consumption Operating Voltage Operating Temperature Storage Temperature	10W 24V DC -20°C TO 50°C – (-4°F TO 122°F) -20°C TO 70°C – (-4°F TO 158°F)
Physical	Dimensions Housing Lens Weight IK Rating IP Rating Finish Source Life Connection Mounting Snoot CRI	Ø85mm x 93mm (Body Excludes Accessories) Anodised Aluminium Tempered Glass 0.85kgs (non-hood option) IK07 IP66 Anodised Brushed Aluminium, Corrosion Resistant 50,000 hours/L70 at 25°C 5-Pin DMX / 3Pin SPI / 2Pin Single Colour / 4 Pin X-Stream Pushlock Connectors Hook-on Bracket, Landscape Spike Full Snoot, Half Snoot, None >82 (92 available on request)
Optical	Beam Angle Colour Range LED Type	10°, 25°, 40°, 20°x40°, 10°x35°, 10°x60°, 30°x60° White (2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K), RGB, RGBW, RGBA, Dynamic White (2000K-5000K) High Power LEDs
Dimming & Control	Dimming Protocols	X-Stream, SPI, DMX, PWM
Fixture Rating & Certifications	CE	
Limited Warranty	5 Years	Extendable Warranty Available


BXS 10 | SPOTLIGHT SERIES RANGE

DIMENSIONS AND MOUNTING

DIMENSIONS – NO SNOOT

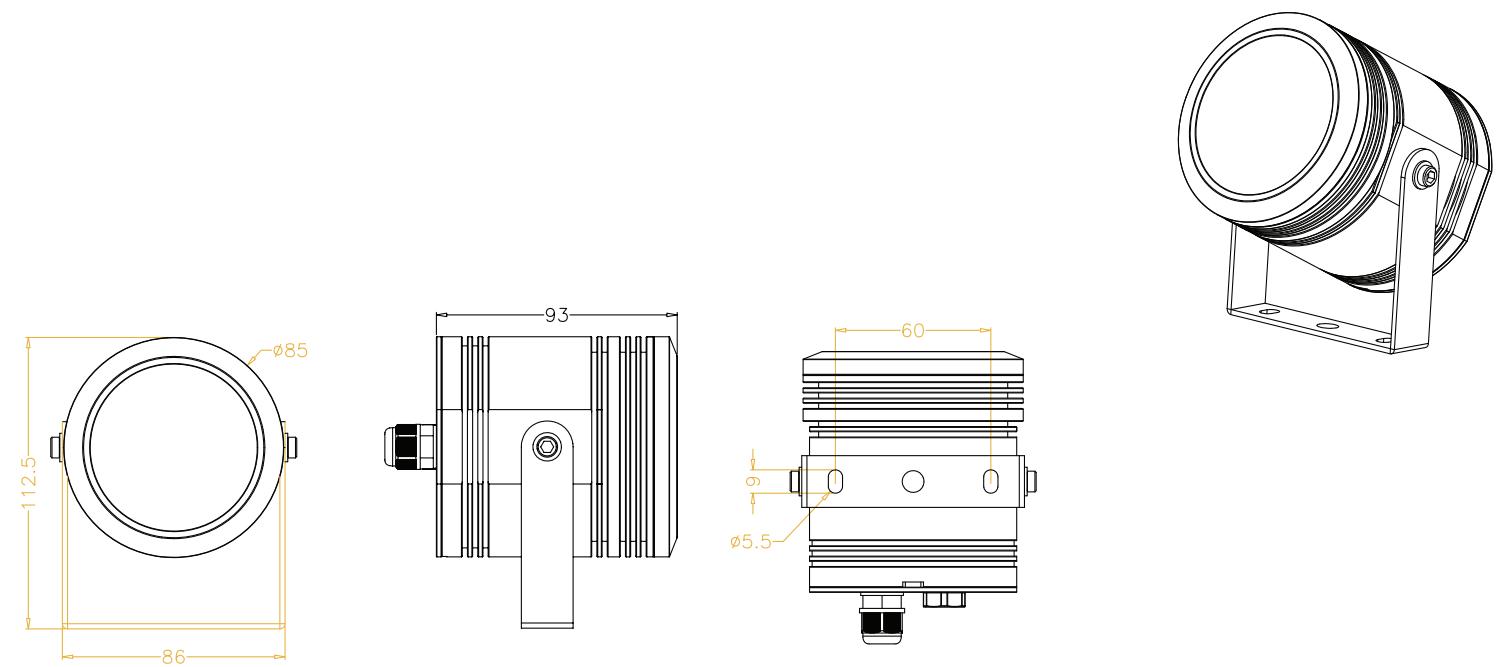


DIMENSIONS – HALF SNOOT

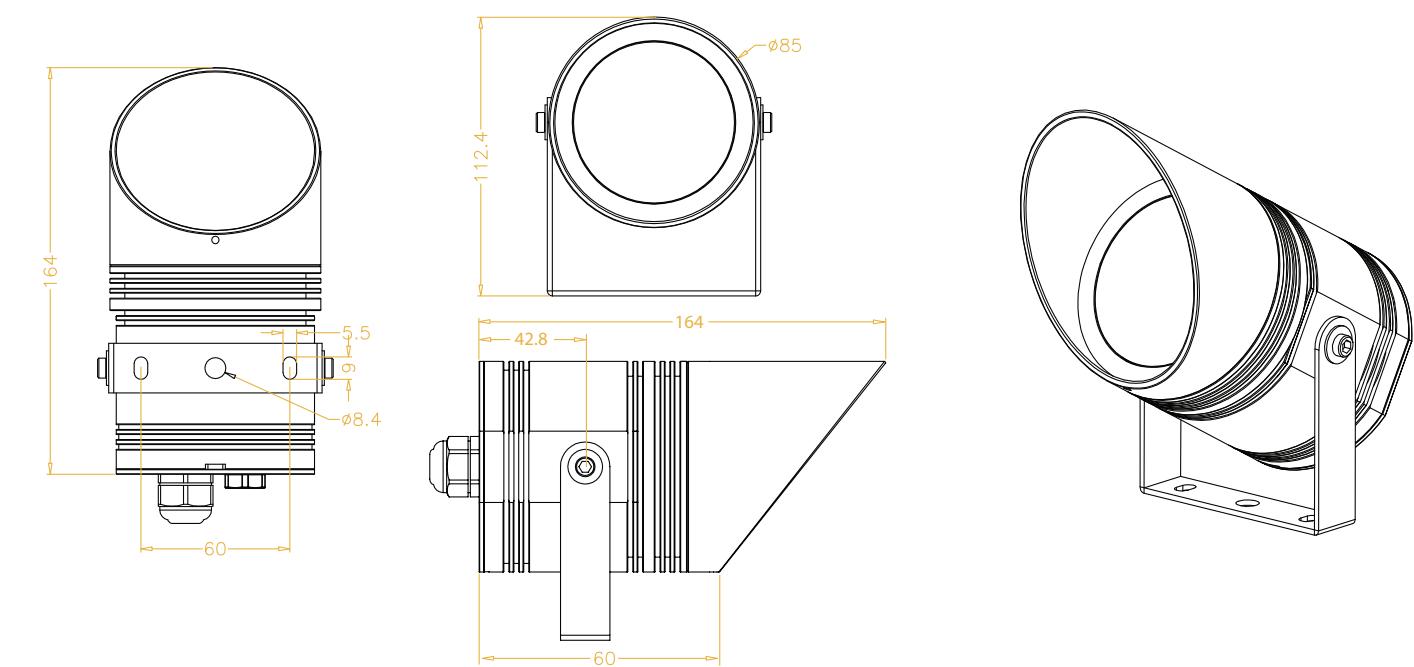

BXS 10 | SPOTLIGHT SERIES RANGE

DIMENSIONS AND MOUNTING

DIMENSIONS – FULL SNOOT

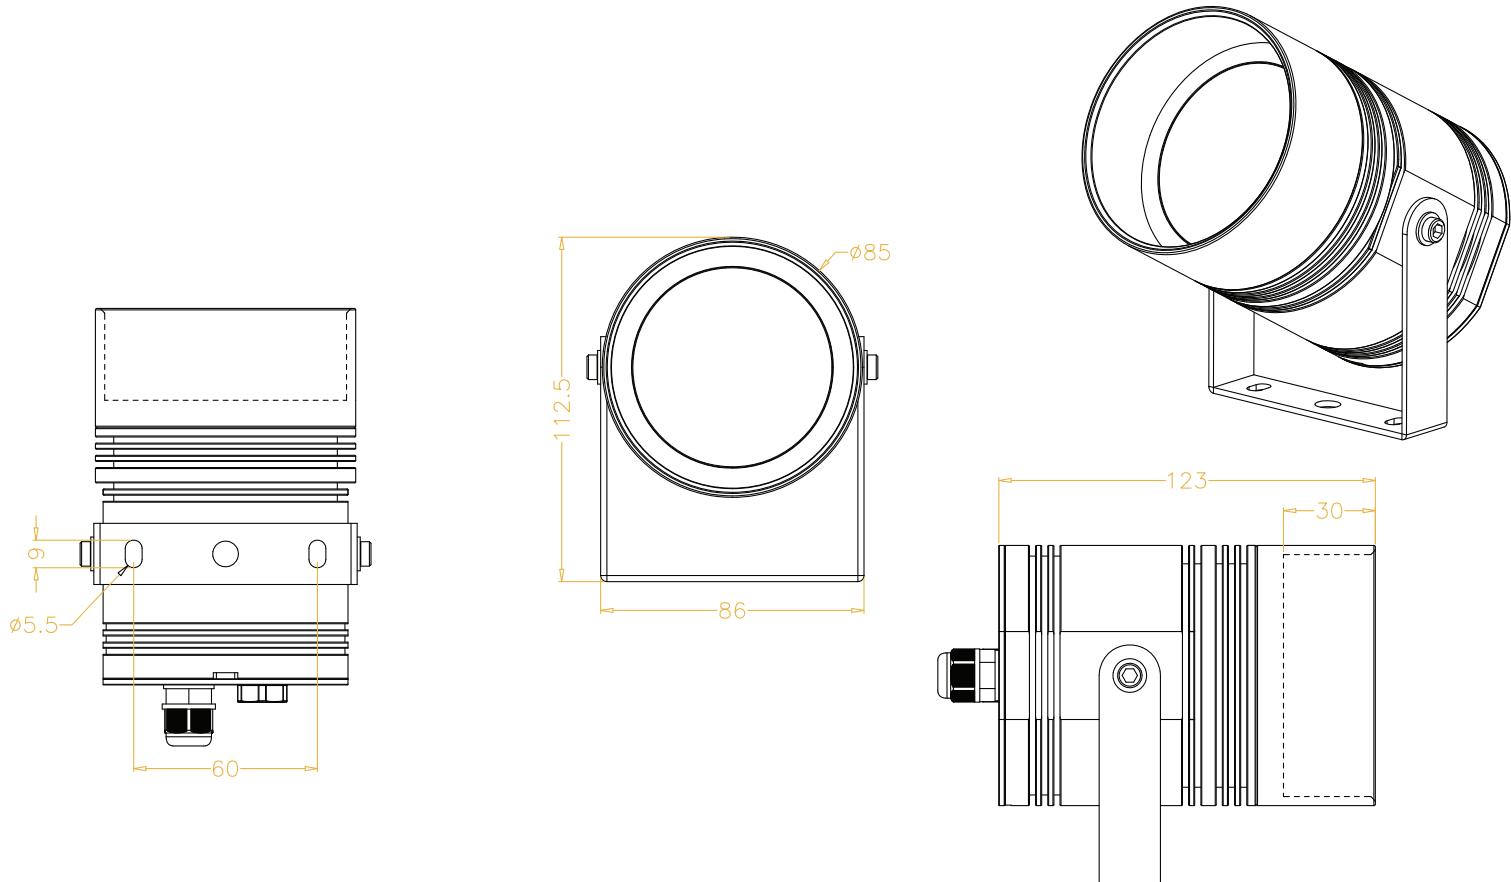

BXS 10 | SPOTLIGHT SERIES RANGE

WIRING CONSIDERATIONS

TYPICAL WIRING DIAGRAM

