


## BXS 30 | SPOTLIGHT SERIES RANGE

The BXS 30 is a compact, high-performance LED spotlight from the BX Beam range, designed for precision lighting in architectural, landscape, and public space applications.

With versatile colour options, precision optics, and multiple control protocols, it offers flexibility for both functional and decorative use.

Housed in anodised aluminium and rated IP66 and IK07 impact protection, the BXS 30 is built for durability and long-term outdoor performance. Custom accessories are available to suit specific project needs.



## PART NUMBER CONFIGURATOR

Prefix	Model	LED Colour	White CCT	Control	Beam Angle	Voltage	Snoot Options	Housing Colour	Mount
BXS	30	RGBW RGBA RGB DW - Dynamic White (20K - 50K) W - White (24K - 60K)	24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K 60K - 6000K	S - SPI D - DMX P - PWM DA - DALI X - X-Stream	5 - 5° 10 - 10° 25 - 25° 40 - 40° 2.4 - 20°x40° 1.3 - 10°x35° 1.6 - 10°x60°	AC - 100-240V AC	FS - Full Snoot CL - Crossed Louver HS - Half Snoot N - None	B - Black G - Grey R - Red C - Custom RAL	B - Hook-on Bracket SR - Suspension Rod

Example: BXS - 30 - RGBW - 40K - S - 25 - AC - FS - G - SR





## SPECIFICATIONS

Electrical	Power Consumption Operating Voltage Operating Temperature Storage Temperature	30W 100-240V AC Input – Integral PSU -20°C TO 60°C – (-4°F TO 140°F) -40°C TO 80°C – (-40°F TO 176°F)
Physical	Dimensions Housing Weight IK Rating IP Rating Finish Source Life Connection Mounting Lens CRI LED Qty	Ø165mm x 223mm (H) With Bracket Die-cast Aluminium 3kgs IK07 IP66 Anodised Brushed Aluminium, Corrosion Resistant 50,000 hours/L70 at 25°C 6Pin AC/DMX cable in and cable out with IP connectors for daisy chain Bracket, Suspension Rod Full Snoot, Crossed Louver, Half Snoot, None >82 (92 available on request) 4pcs
Optical	Beam Angle Colour Range LED Type Luminous Flux	5° (White Only), 10°, 25°, 40°, 20°x40°, 10°x35°, 10°x60° White (2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K), RGB, RGBW, RGBA, Dynamic White (2000K-5000K) High Power LEDs 827lm (RGBW @ 10°) / 1535lm (4000K @ 10°)
Dimming & Control	Dimming Protocols	X-Stream, SPI, DMX, DALI, PWM
Fixture Rating & Certifications	CE	
Limited Warranty	5 Years	Extendable Warranty Available

## BXS 30 | SPOTLIGHT SERIES RANGE

## DIMENSIONS AND MOUNTING


## DIMENSIONS – NO SNOOT

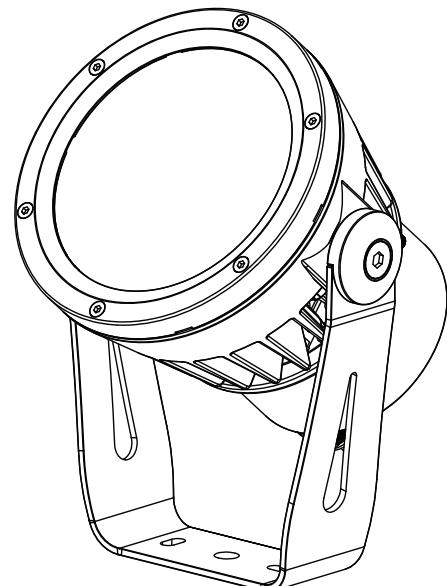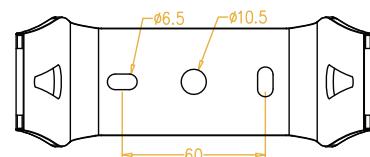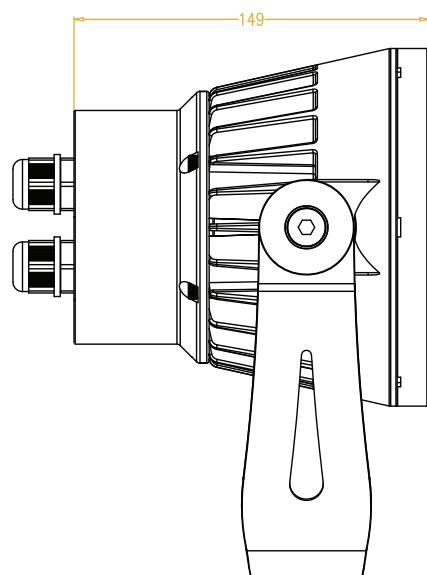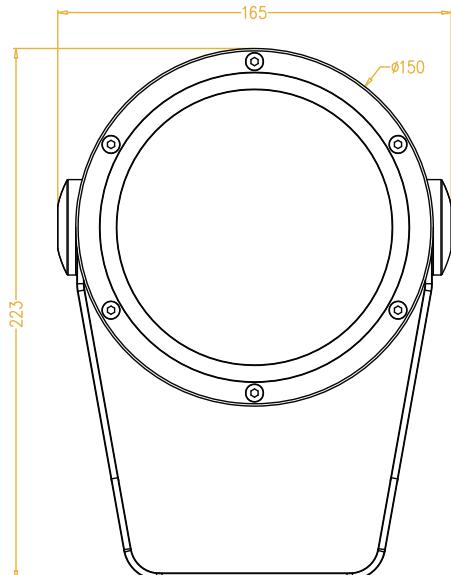


## BXS 30 | SPOTLIGHT SERIES RANGE

## DIMENSIONS AND MOUNTING

## DIMENSIONS – HALF SNOOT

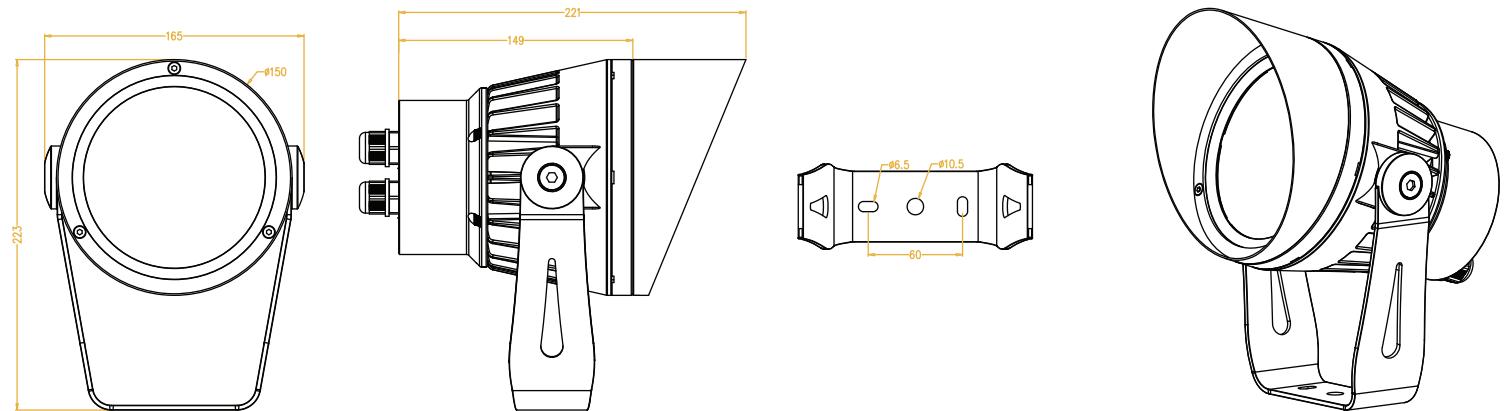


## DIMENSIONS – FULL SNOOT

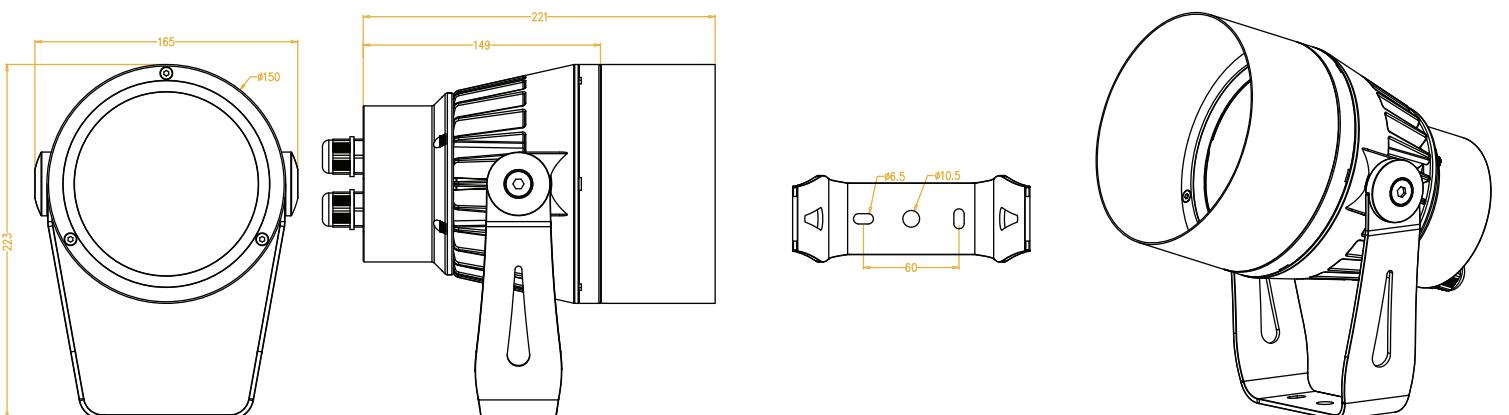


## BXS 30 | SPOTLIGHT SERIES RANGE

## DIMENSIONS AND MOUNTING


## DIMENSIONS – LOUVER

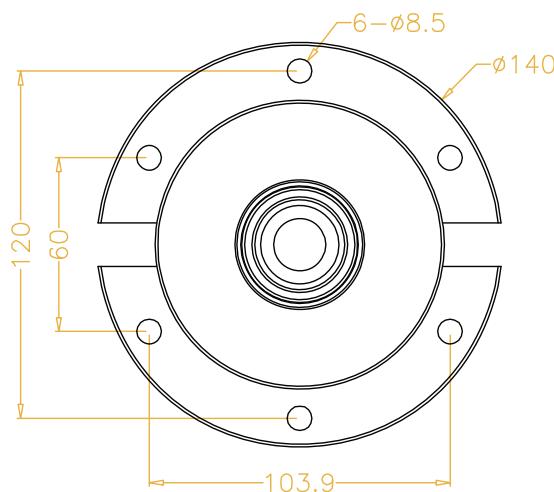

Crossed Louver

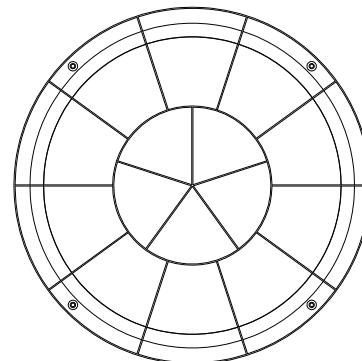

## MOUNTING OPTIONS

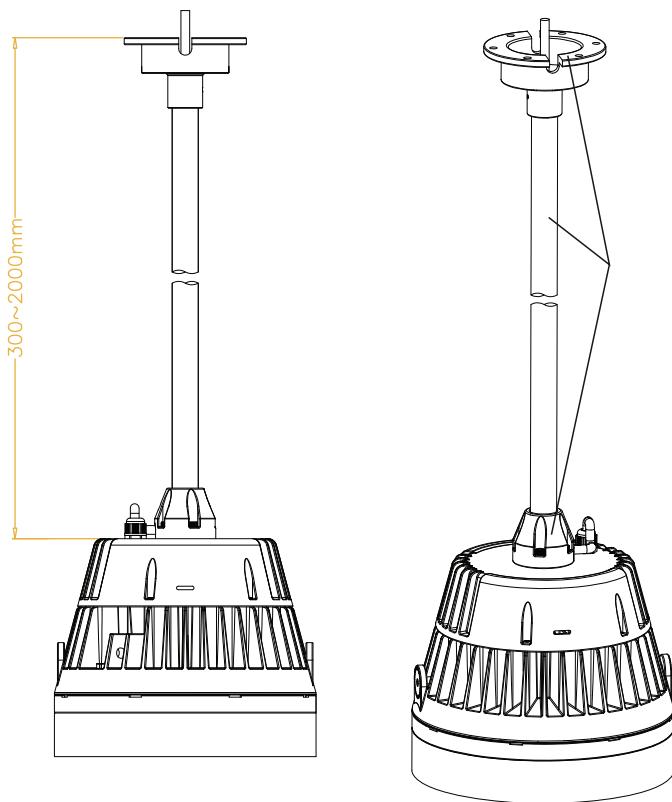

Suspension Rod System