


## DXC | DOWNLIGHT PUCKS CAN

The DXC CAN is a compact architectural downlight designed for clean, targeted illumination in retail, hospitality, and feature-lighting environments. Its minimal cylindrical housing allows for a discreet and modern aesthetic.

Offering RGBW, RGBA, RGB, Dynamic White, and a wide range of White CCT options, it supports flexible colour control. Optical choices – including a 10° beam, clear or frosted lenses, and optional honeycomb – enable both precise accents and softer washes.

Built from durable die-cast housing and available in multiple finishes, the DXC CAN operates on 24V DC with plug-and-play connectors, ensuring reliable performance and easy installation.



## PART NUMBER CONFIGURATOR

Prefix	LED Colour	White CCT	Control	Beam Angle	Voltage	Lens Options	Housing Colour	Mounting	Accessories
DXC	RGBW RGBA RGB DW - Dynamic White (20K - 50K) W - White (24K - 60K)	24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K 60K - 6000K	S - SPI	10 - 10° N - None	24 - 24V DC	C - Clear PMMA M - Milky PMMA	B - Black W - White BR - Brass C - Custom RAL	C - Clipped Mount SM - Surface Mount SB - Screw Bracket	H - 5mm Honeycomb N - None


Example: DXC - RGBW - 27K - S - 10 - 24 - C - B - C - H

## SPECIFICATIONS


Electrical	Power Consumption Operating Voltage Operating Temperature Storage Temperature	3W/pc (RGBW) 24V DC -20°C TO 50°C - (-4°F TO 122°F) -20°C TO 70°C - (-4°F TO 158°F)
Physical	Dimensions Housing IP Rating Lens Options Accessories Source Life Connection LED Qty Optics Mounting	Ø75mm x 80mm (H) Die-cast Aluminium (Natural, Black, White, Brass, Custom RAL) IP20 Clear PMMA, Milky PMMA 5mm Honeycomb, None 50,000 hours/L70 at 25°C 4 Pin DC Plug / Play Connectors Max 5m 10° / Clear / Frosted (honeycomb available) Spring Clip, Surface Mount, Screw Bracket
Optical	Beam Angle Colour Range LED Type	10° White (2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K), RGB, RGBW, RGBA, Dynamic White (2000K-5000K) 23pcs SMD LED
Dimming & Control	Dimming Protocols	SPI – Pixel IC on-board
Fixture Rating & Certifications	CE	
Limited Warranty	5 Years	Extendable Warranty Available

DXC | DOWNLIGHT PUCKS CAN  
DIMENSIONS AND MOUNTING

## DIMENSIONS – SPRING CLIP

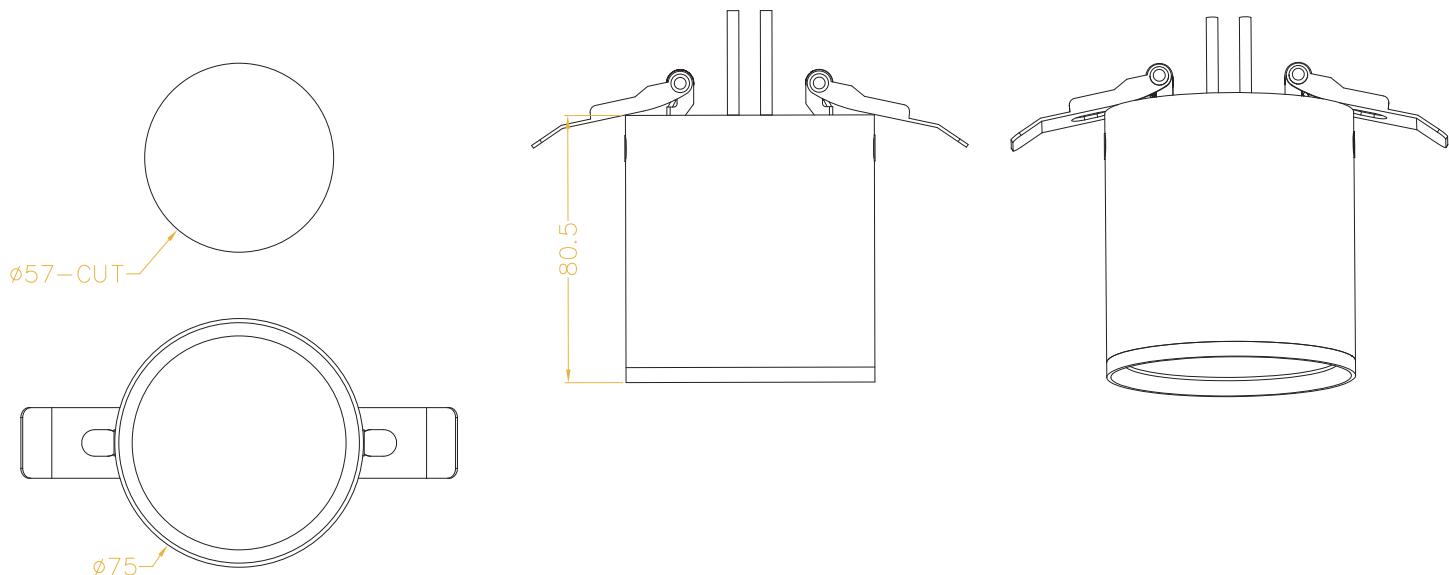

## DIMENSIONS – SURFACE MOUNT

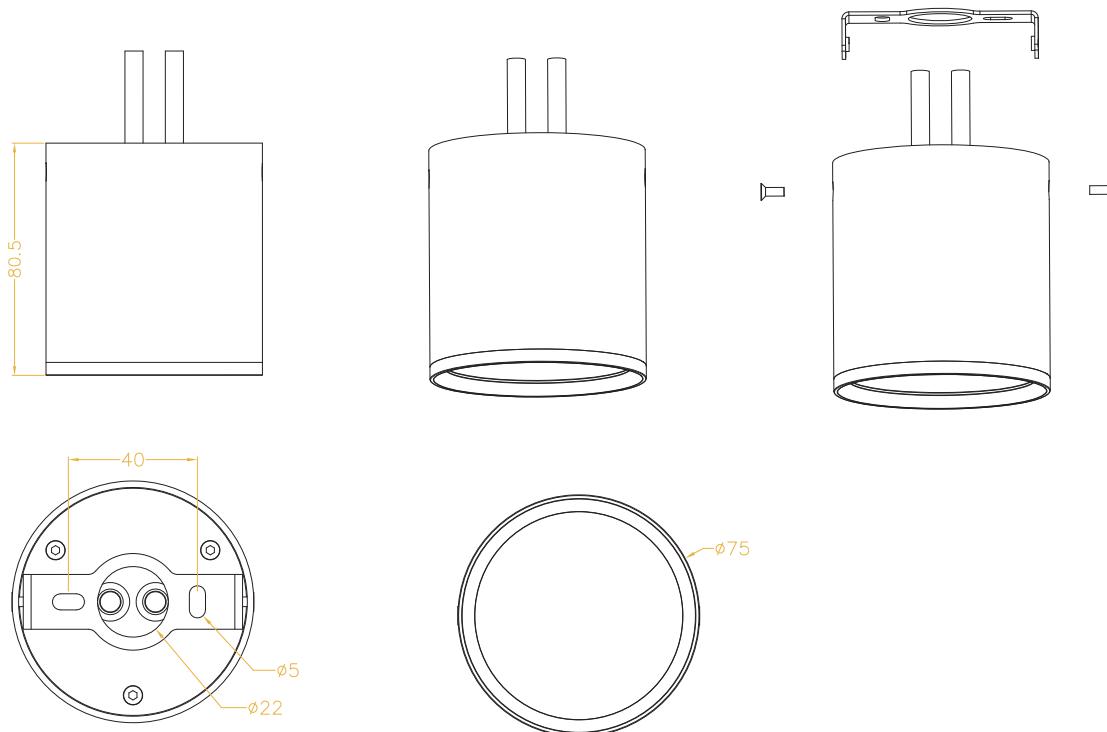

## DXC | DOWNLIGHT PUCKS CAN

## DIMENSIONS AND MOUNTING

## DIMENSIONS – SCREW BRACKET

