


FXF | FLEXIBLE FESTOON SERIES

Bring any space to life with our premium RGBW Festoon Bulbs designed to provide vivid colour and all-weather performance. Each bulb delivers individually controllable dynamic lighting and smooth colour mixing, from warm whites to bold hues.

Engineered with a rugged IP67-rated housing and integrated catenart mounting systems, these festoons are made to thrive outdoors, perfect for festivals, hospitality venues, and architectural accents.

Easy to install, low-voltage, and long-lasting, they're the smart choice for standout, scalable illuminations.

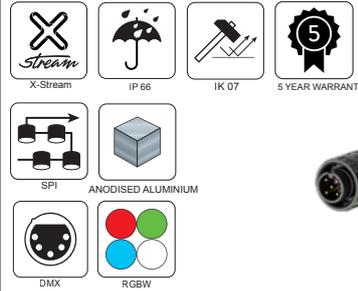

PART NUMBER CONFIGURATOR

Prefix	LED Colour	White CCT	Control	Beam Angle	Power	Voltage	Mounting
FXF	RGBW	24K – 2400K 27K – 2700K 30K – 3000K 35K – 3500K 40K – 4000K 50K – 5000K 60K – 6000K	D – DMX R – RDM S – SPI X – X-Stream	140 – 140°	1 – 1W	48 – 48V DC	HM – Hanging Mount AM – Awning Mount

SPECIFICATIONS

Example: FXF – RGBW – 24K – S – 140 – 1 – 48 – HM

Electrical	Power Consumption Operating Voltage Operating Temperature Storage Temperature	1W / unit 48V DC -20°C TO 50°C – (-4°F TO 122°F) -20°C TO 70°C – (-4°F TO 158°F)
Physical	Dimensions Housing / Lens Connection IP Rating Maximum Run Length	60mm (Dia) x 116mm (H) PC Housing with UV stabilizer 4-in-1 RGBW IP67 60 meters per string
Optical	Beam Angle Colour Range LED Type	140° RGBW SMD LEDs
Dimming & Control	Dimming Protocols Controlled	DMX, RDM X-Stream with integrated SPI Booster
Fixture Rating & Certifications	CE	
Limited Warranty	5 Years	Extendable Warranty Available

FXF | FLEXIBLE FESTOON SERIES

DIMENSIONS & MOUNTING

