

UNPACKING - White Box Packing







3

















UNPACKING - Reel Packaging













WWW.LEDCTRL.COM




UNPACKING - Reel Packaging





Uncoiling Roller



Put the light on the middle of uncoiling roller



Rotate the roller edge to uncoil the light with another hand



Use recommended cutter to cut the light vertically



Roll up the rest of the light



Protect the light end and fix it




Uncoiling Roller (Optional Device)



BASIC PARAMETERS

- Dimensions: 11.5mm * 21mm.
- 2. Min. bending diameter: 120mm.
- Protection rate: IP68/IP67/IP65/IP40/IP20 3.
- IP68 protection rate: Protected against dust and submersion in water (1 meter above).
- The product IP Rate is ultimately in line with properly applied IP rated connectors. Connector termination required after cutting to achieve appropriate IP Rating.
- 6. Easy to use, with a range of accessories for joining, terminating, mounting & powering.
- Long lifetime: 5 years.
- Environmental Working Temperature: -20°C TO 45°C (High Voltage: -20°C TO 35°C) Environmental Installation Temperature: 0°C TO 45°C (High Voltage: 0°C TO 35°C) 8.



Note: Unless otherwise stated, the tolerance of light is ±0.3mm.

Electrical	Power Consumption Operating Voltage Installation Temperature Operating Temperature Storage Temperature	15W per metre (fixed, standard configuration) 24V DC -40°C TO 50°C - (-40°F TO 122°F) -40°C TO 55°C - (-40°F TO 131°F) -40°C TO 60°C - (-40°F TO 140°F)					
Physical	Dimensions Bending Housing / Lens Weight/m IK Rating IP Rating Min. Cutting Unit Min. Bending Diameter Unit/m (Pixel Qty/m) Connectors Mounting Profiles Mounting Brackets Mounting Clips Data Maximum Run Length	L: 1000mm – H: 21mm – W: 11.5mm Horoizontal Bending Silicone 325g IK08 IP67 10LEDs(1unit) 166.7mm(1unit) 120mm 6 pixels Swivel Connector, Sleeve Connector, Snap Connector, Socket Connector, Injection-moulded Conne Silicone Injection-moulded Connector, Dual Injection-moulded Connector Aluminium Profile, Flange Aluminium Profile, Serrated Aluminium Profile, Flange Serrated Aluminiu Profile, Thickened Plastic Profile, Bendable Serrated Aluminium Profile, Surface-mounted Raceway Aluminium Profile, Suspended Raceway Aluminium Profile, Bendable Anole Profile Pivot Bracket, Rotary Locking Bracket, Side Mounting Bracket, Joining Bracket Ceiling Mounting Clip, Suspended Mounting Clip, Cable-exit Mounting Clip 128m @ 6pixels/m – 6 universes					
	Beam Angle Colour Range LED Qty/m LED Type LED Distance Total Lumens	120° RGBW, RGB, White 60LEDs EPISTAR SMD LED 16.67mm >280lm/m					
Diming & Control	Control Protocols Dimming Resolution	X-Stream: SPI protocol with data redundancy Others – SPI, DMX					
Fixture Rating & Certifications	UL LISTED, CE RoHs COMPLIANT	C E ROHS UL					
Limited Warranty	5Years	Extendable Warranty Available					


LED CTRL, 1/483 BALMAIN


LILYFIELD, NSW 2040, AUSTRALIA



CAUTIONS

- 1. Before making any cuts, installation, maintenance or connection, be sure the main is disconnected.
- 2. Note all connectors should be properly installed to achieve the appropriate level of IP, IP Rating can NOT be achieved without connector termination.
- 3. Please operate this flex light by instructions, and confirm the work voltage, it must be matched with product requirements.
- 4. Plase confirm the polarity of connector before insertion front connection cable.
- 5. Connect and cut this product correctly. Any wrong operation will damage this product.
- 6. Using qualifies DC power supply.
- 7. Please correctly use and bend this flex ribbon light, see the figures below.
- 8. Do not operate light when ambient temperature exceeds the range of specified temperature in User Manual.
- 9. Do not energise the light over 30 minutes in coil packaging.
- 10. Do not mix the four colours (R, G, B, W) in full load simultaneously.






Do not bend smaller than allowed minimum bend diameter 120mm.

(HB) Horizontal Bending






INSTRUCTIONS FOR LIGHT CUTTING




Cut the light only at printed cutting line with printing mark face upwards.

Note:

- Place the light horizontally when cutting it.
- Use only factory-recommended cutter.
- Cut the light according to the following instructions Incorrect operation will damage the light.




Cut the light only at printed cutting line with printing mark face upwards






Cutting line

The cutting surface must be flush and smooth








Cutting can only be made at the printed cutting line

Please use a smooth and sharp cutter for cutting when the dedicated cutter is not available, any rusty or jagged cutter is prohibited

Note: Waterproof may not be achieved with the following situations











SCREW FRONT CONNECTOR

Please ignore these steps if the front connector has been assembled before delivery.

Note:


- 1. Never wet the assembly units or assemble with wet hands.
- 2. Please use the tools correctly.
- 3. Please pay attention to personal security when using tools.
- 4. Repeated assembly or reuse of the connector may result in waterproof failure.

1.Components of Front Connector

Note

The light ends are marked with either an 01 or an 02. Always make sure to use an identically labeled connector for the appropriate direction.

2. Tools:

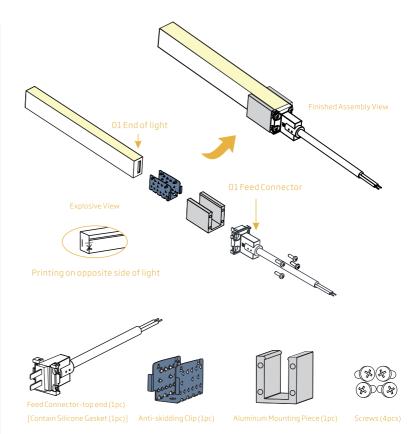







SCREW FRONT CONNECTOR

3. Installation Steps


3.1 Treatment of Anti-Skidding Clip



Unfold the anti-skidding clip about 20 degrees on both sides.

3.2 Installation of Anti-Skidding Clip


Prepare the light, and the end surface should be flush and smooth.

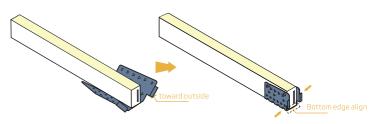

Place the anti-skidding clip onto the end of the light.

Fit the anti-skidding clip to the end of the light so that it wraps tightlu and its brim is aligned with the bottom cut edge of the light.

3.3 Installation of Aluminum Mount Piece

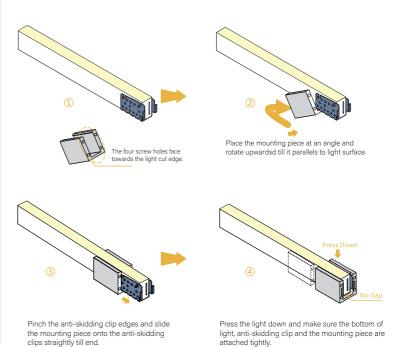







SCREW FRONT CONENCTOR

3.4 Inducing a Cavity for Feed Connector

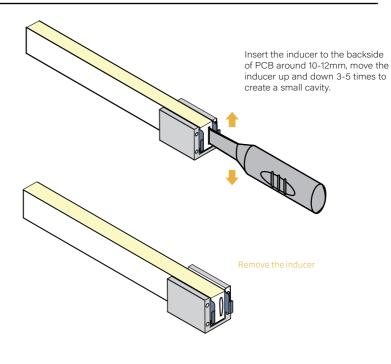



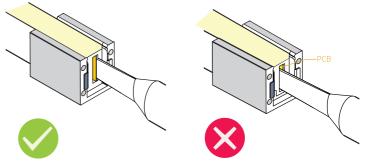

Insert the inducer into the backside of PCB

It will damage the light if insert into front side of PCB






SCREW FRONT CONNECTOR


3.5 Inserting the Feed Connector

The operations on the right are prohibited:


3.6 Screws Fixation for Front Connector

Please energize the light to check its functionality and do waterproof reliability testing (refer to "waterproof reliability testing instruction" video) after connector assembly.

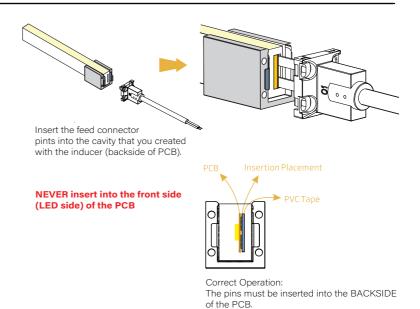









Insert crosswise into the PCB



Insert crosswise into the PCB

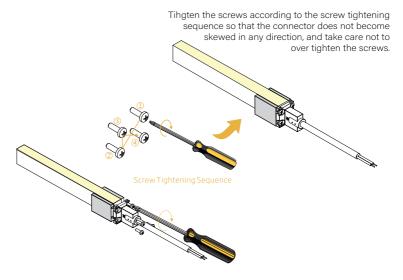



SCREW END CAP

Please ignore these steps if the end cap has been assembled before delivery.

Note:

- $1. \, \text{Never wet the assembly units or assemble with} \\ \text{wet hands}.$
- 2. Please use the tools correctly.
- 3. Please pay attention to personal security when using tools.
- 4. Repeated assembly or reuse of the connector may result in waterproof failure.









Silicone Gasket (1pc)



Anti-skidding Clip (1pc)



Screws (4pcs)







SCREW END CAP

3.Installation Steps:


3.1 Treatment of Anti-Skidding Clip

3.2 Installation of Anti-Skidding Clip

3.3 Installation of Aluminum Mount Piece



Unfold the anti-skidding clip about 20 degrees on both sides.

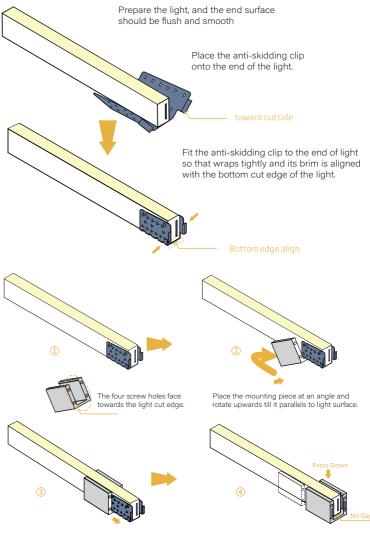



Press the light down and make sure the bottom of light, anti-skidding clip and the mounting piece are attached tightly.




WWW.LEDCTRL.COM




SCREW END CAP

3.4 Screw Fixation for End Cap

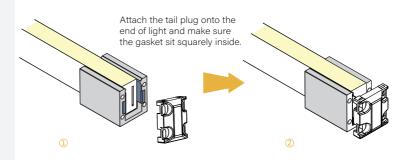

The silicone gasket is attached on the tail plug.

3.5 Screw Fixation for End Cap

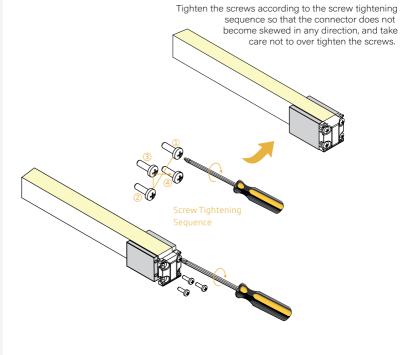

Please energize the light to check its functionality and do waterproof reliability testing (refer to "waterproof reliability testing instruction" video) after connector assembly.




CLASP FRONT CONNECTOR

Please ignore these steps if the front connector has been assembled before delivery.

Note:

- $1.\,Never\,wet\,the\,assembly\,units\,or\,assemble\,with$ wet hands.
- 2. Please use the tools correctly.
- 3. Please pay attention to personal security when using tools.
- 4.Repeated assembly or reuse of the connector may result in waterproof failure.

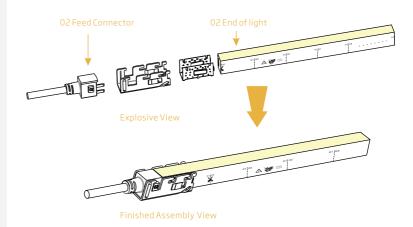


1. Components of Front **Connector**

The light ends are marked with either an 01 or an 02. Always make sure to use an identically labeled connector for the appropriate direction.




Anti-skidding Clip (1pc)





2.Tools








WWW.LEDCTRL.COM



CLASP FRONT CONNECTOR


3.Installation Steps


3.1 Inducing a Cavity for Feed Connector

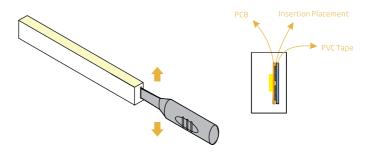

NEVER insert into the front side (LED side) of the PCB.

Insert the inducer to the backside of PCB around 10 \approx 12mm, move the inducer up and down 3 \approx 5 times gently to create a small cavity.







Insert the inducer into the backside of PCB

It will damage the light if insert into front side of PCB

3.2 Insert the Feed Connector

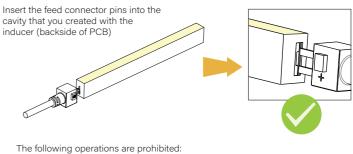



Insert crosswise into the PCB






CLASP FRONT CONNECTOR

3.3 Treatment of Anti-skidding Clip




Unfold the anti-skidding clip about 20 degrees on both sides.



Place the anti-skidding clip onto the end of the light. Notice its installation direction.

Fit the anti-skidding clip to the end of the light tightly and align with the light end edge.


3.4 Installation fo U Steel Plate

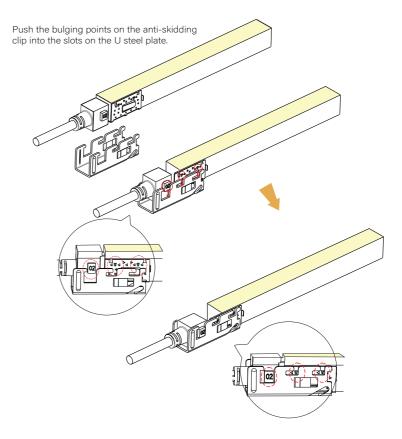



CLASP FRONT CONNECTOR

3.5 Push the anti-skidding clip to the end until the two hook splinters on each side pop out to lock the U steel plate. Use the gripper to help tighten the piece.

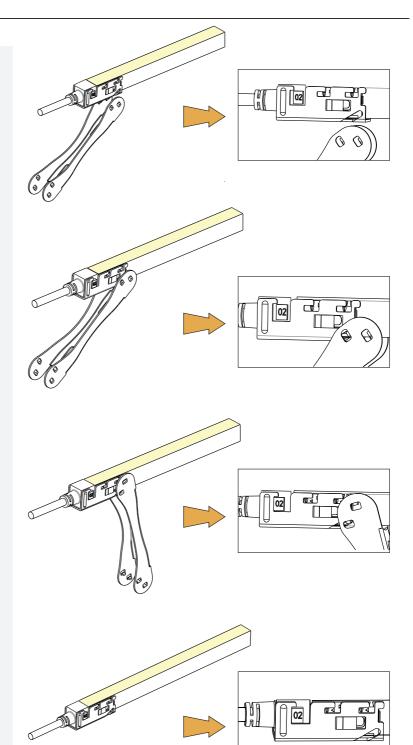

Please energise the light to check its functionality and do waterproof reliability testing (refer to "waterproof reliability testing instruction" video) after connector assembly.






CLASP END CAP

Please ignore these steps if the end cap has been assembled before delivery.

Note:

- 1. Never wet the assembly units or assemble with wet hands.
- 2. Please use the tools correctly.
- 3. Please pay attention to personal security when using tools.
- 4. Repeated assembly or reuse of the connector may result in waterproof failure.

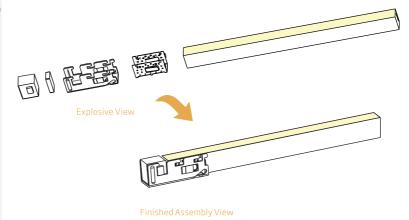

1. Components of End Cap



Anti-skidding Clip (1pc)






eel Plate (1pc) Silicone Gasket(1pc)



Tail Plug (1pc

2.Tools






CLASP END CAP

3.Installation Steps

3.1 Place the tail plug into the U steel plate


3.2 Treatment of Anti-Skidding Clip

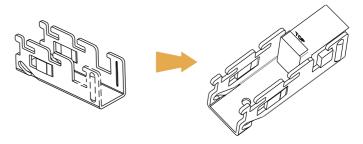

The silicone gasket is attached on the tail plug.



Unfold the anti-skidding clip about 20 degrees on both sides.

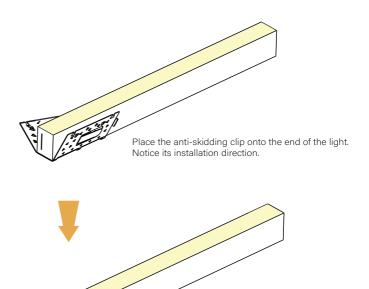








CLASP END CAP

3.3. Installation of Tail Plug

3.4 Push the anti-skidding clip to the end until the two hook splinters on each side pop out to lock the U steel plate. Use the gripper to help tighten the piece.

Please energise the light to check its functionality and do waterproof reliability testing (refer to "waterproof reliability testing instruction" video) after connector assembly.

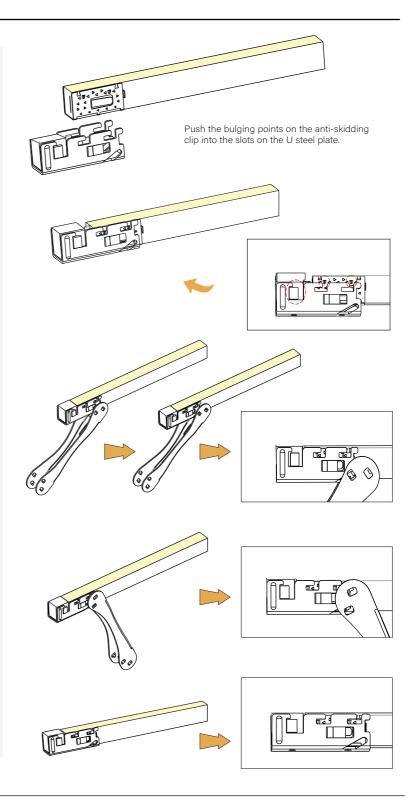





SLEEVE FRONT CONNECTOR

Please ignore these steps if the front connector has been assembled before delivery.

Note:

- 1. Never wet the assembly units or assemble with wet hands.
- 2. Please use the tools correctly.
- 3. Please pay attention to personal security when using tools.
- 4. Repeated assembly or reuse of the connector may result in waterproof failure.




Note:


The light ends are marked with either an O1 or an O2. Always make sure to use an identically abeled connector for the appropriate direction.



2.1 Placing PC Cover

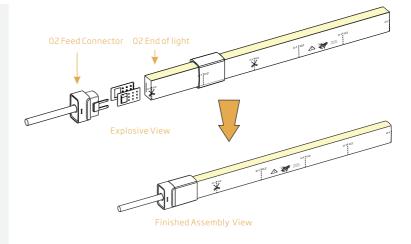



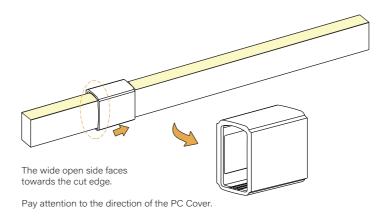





SLEEVE FRONT CONNECTOR

3.Installation Steps

3.1 Inducing a Cavity for Feed Connector

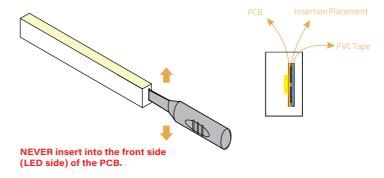


Insert the inducer to the backside of PCB around 10 \approx 12mm, move the inducer up and down 3 \approx 5 times gently to create a small cavity.




Insert the inducer into the backside of PCB

It will damage the light if insert into front side of PCB

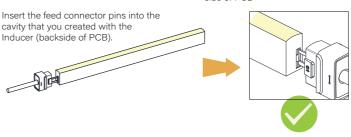

Insert the inducer into the backside of PCB

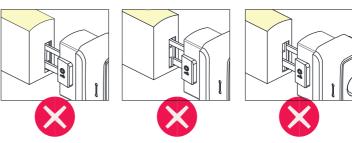






3.2 Insert the Feed Connector




SLEEVE FRONT CONNECTOR

3.3 Installation of Anti-Skidding Clip

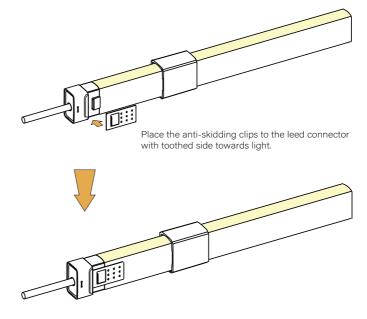

3.4 Slide back the PC Cover to cover the anti-skdding clip completely.

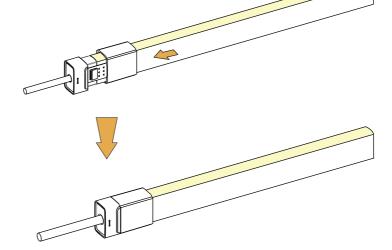

Please energize the light to check its functionality after connector assembly.



SLEEVE END CAP

Please ignore these steps if the end cap has been assembled before delivery.

Note:

- $1. \, \text{Never wet the assembly units or assemble with } \\ \text{wet hands}.$
- 2. Please use the tools correctly.
- 3. Please pay attention to personal security when using tools.
- 4. Repeated assembly or reuse of the connector may result in waterproof failure.

1. Components of End Cap

Note


The light ends are marked with either an 01 or an 02. Always make sure to use an identically abeled connector for the appropriate direction.


2. Installation Steps


2.1 Placing Shading Sheat


2.2 Insert the PC Cover

Please check its OK

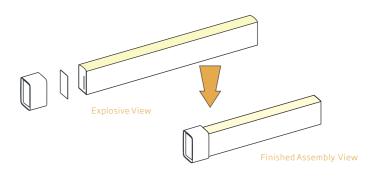









SNAP FRONT CONNECTOR

Please ignore these steps if the front connector has been assembled before delivery.

Note:


- 1. Never wet the assembly units or assemble with
- 2. Please use the tools correctly.
- 3. Please pay attention to personal security when using tools.
- 4. Repeated assembly or reuse of the connector may result in waterproof failure.

1. Components of Front Connector

Note:

The light ends are marked with either an 01 or an 02. Always make sure to use an identically abeled connector for the appropriate direction.

2. Tools

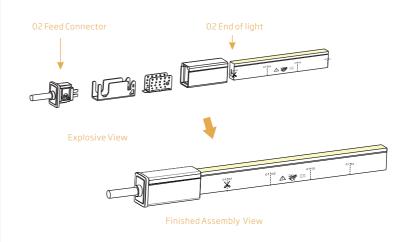



Anti-skidding Clip (1pc)






Feed Connector-top end (1pc) Feed Connector-side (1pc)



Feed Connector-bottom (1pc) $[{\sf Contain\,Silicone\,Gasket\,(1pc)}] \quad [{\sf Contain\,Silicone\,Gasket\,(1pc)}] \quad [{\sf Contain\,Silicone\,Gasket\,(1pc)}]$








SNAP FRONT CONNECTOR


3. Installation Steps


3.1 Placing PC Cover

3.2 Inducing a Cavity for Feed Connector

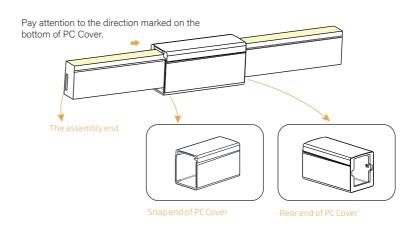


(LED side) of the PCB









NEVER insert into the front side


It will damage the light if insert into front side of PCB.

► PVC Tape




SNAP FRONT CONNECTOR

3.3 Inserting the Feed Connector



The following operations are prohibited:




3.4 Treatment of Anti-skidding Clip


3.5 Installation of Anti-Skidding Clip



Unfold the anti-skidding clip about 20 degrees on both sides.

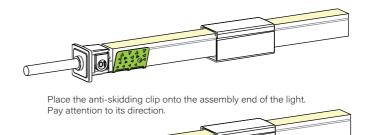

Fit the anti-skidding clip to the end of the light so that it wraps tighlty and its brim is aligned with the cut edge on both sides.




WWW.LEDCTRL.COM



SNAP FRONT CONNECTOR

3.6 Installation of U Steel Plate and PC Cover

Please energise the light to check its functionality and do waterproof reliability testing (refer to "waterproof reliability testing instruction" video) after connector assembly.

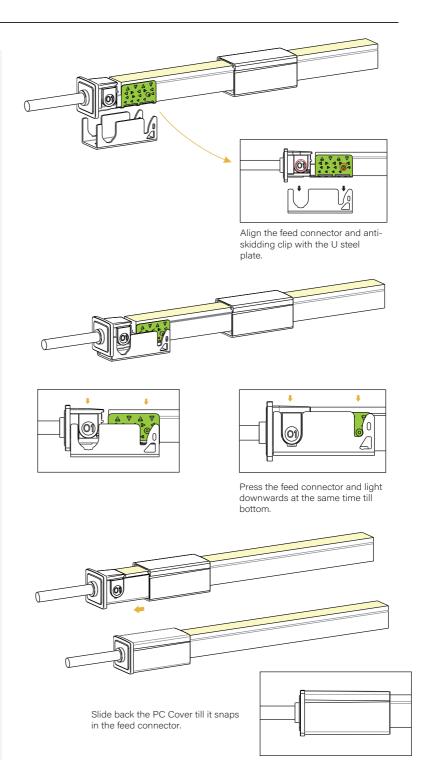





SNAP END CAP


Please ignore these steps if the End Cap has been assembled before delivery.


Note

 $1. Repeated \ assembly \ or \ reuse \ of \ the \ connector \ may \\ result in \ waterproof failure.$

1. Components of End Cap

2. Tools

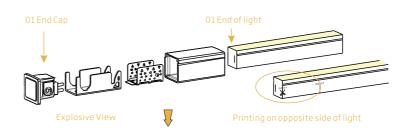









Anti-skidding Clip (1pc)

U Steel Plate (1pc)

PC Cover (1po



Tail Plug (1pc)
[Contain Silicone Gasket (1pc)]




Induce




SNAP END CAP

3. Installation Steps


3.1 Placing PC Cover

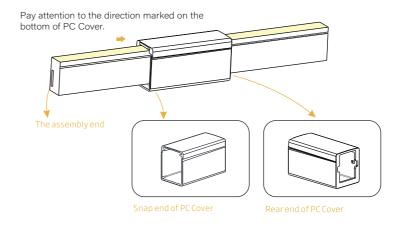

3.2 Inducing a Cavity for Tail Plug

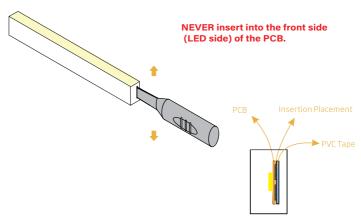

Insert the inducer to the backside of PCB around 10 \approx 12mm, move the inducer up and down 3 \approx 5 times gently to create a small cavity.



Insert the inducer into the backside of PCB.


It will damage the light if insert into front side of PCB.






SNAP END CAP

3.3 Inserting the Feed Connector



3.4 Treatment of Anti-skidding Clip

3.5 Installation of Anti-Skidding Clip

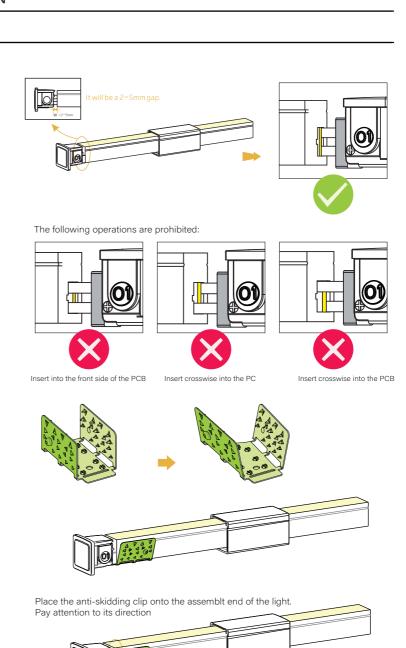




the cut edge on both sides.

Fit the anti-skidding clip to the end of so that it wraps tightly and its brim is aligned with



SNAP END CAP

3.6 Installation of U Steel Plate and PC Cover

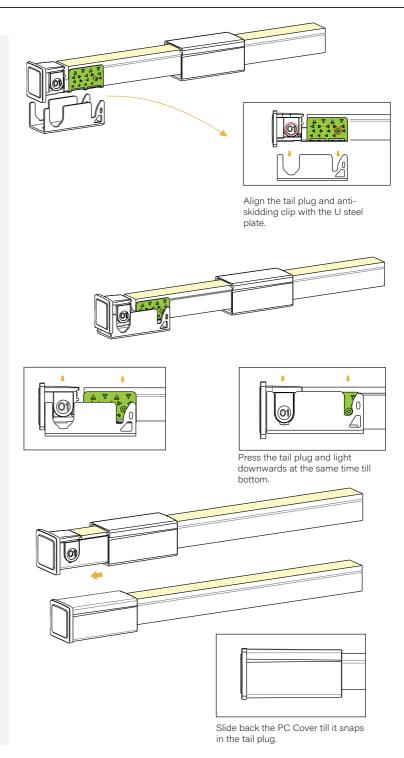

Please energise the light to check its functionality and do waterproof reliability testing (refer to "waterproof reliability testing instruction" video) after connector assembly.







SWIVEL FRONT CONNECTOR

Please ignore these steps if the front connector has been assembled before delivery.

Note:

- $1.\, Never\, wet\, the\, assembly\, units\, or\, assemble\, with\, wet\, hands;$
- 2. Please use the tools correctly;
- 3. Please pay attentions to personal security when using tools.
- 4. Failure to properly seal and assemble as instructed may void warranty.
- 5. Repeated assembly or reuse of the connector may result in waterproof failure.






Finished Assembly View

1.Components of Front Connector

Note

The light ends are marked with either an $01\,\text{or}$ an 02. Alays make sure to use an identically labeled connector for the appropriate direction.



Feed Connector-top end (1pc)
[U Steel Plate (1pc)]

2. Tools




X LED CTRL




SWIVEL FRONT CONNECTOR


2.Installation Steps

2.1 Inducing a Cavity for Feed Connector



Insert the inducer to the backside of PCB around 10 \approx 12mm, move the inducer up and down 3 \approx 5 times gently to create a small cavity.

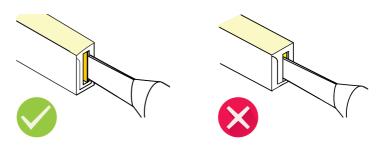




Insert the feed connector pins into the cavity that you created with the inducer (backside of PCB).




The silicone gasket attached to on the feed connector.


The following operations are prohibited:



Insert into the front side of the PCB



Insert crosswise into the PCB



Insert corosswise into the PCB




2.2 Inserting the Feed ConnectorRotate the feed connector pin to make its orientation vertical and insert it into the backside of PCB tightly.



SWIVEL FRONT CONNECTOR

2.3 Rotate back till the light seat into the steel plate tightly

Apply power to test light after assembly

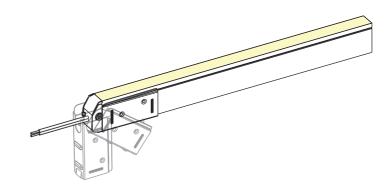




SWIVEL END CAP

Please ignore these steps if the end cap has been assembled before delivery.

Note:

- 1. Never wet the assembly units or assemble with wet hands;
- 2. Please use the tools correctly;
- 3. Please pay attentions to personal security when using tools.
- 4. Failure to properly seal and assemble as instructed may void warranty.
- 5. Repeated assembly or reuse of the connector may result in waterproof failure.

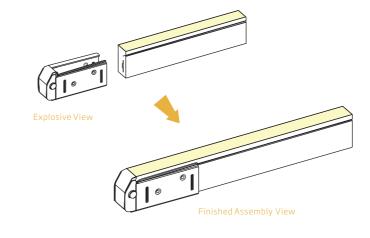

1. Components of End Cap

2.Installation Steps

2.1 Rotate the end cap clockwise by 90 degrees.



Put the light end and end cap together and rotate it to seat into the steel plate horizontally. Slide the light to the end cap and make sure they are attached tightly.






DIAGRAM OF LIGHT WIRING

1. Monochrome Light Wiring

Note:

- 1. This LED Neon Flex Ribbon must be used in conjunction with DC24V power supply.
- 2. Always observe proper ploraity
- 3. Ensure to add 20% buffer when sizing power supply.
- 4. Ensure that the power cable carried current is no greater than 80% of its capacity.
- To minimise the voltage drop and keep light consistency, position power supply nearest to the power feed end of LED Neon Flex Ribbon and keep the power line as short as possible.

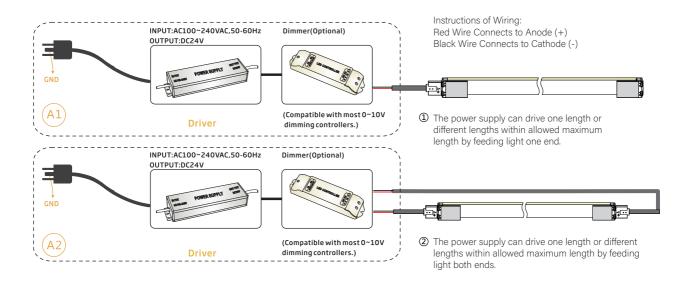




DIAGRAM OF LIGHT WIRING

2. RGB Light Wiring

Note:

- This LED Neon FLlex Ribbon must be used in conjunction with DC24V power supply.
- 2. Always observe proper ploraity. Polarity symbols should match on each component.
- 3. Ensure to add 20% buffer when sizing power supply.
- 4. Ensure that the power cable carried current is no greater than 80% of its capacity.
- To minimise the voltage drop and keep light consistency, position power supply nearest to the power feed en of LED Neon Flex Ribbon and keep the power line as short as possible.
- 6. Compatible with RGB controller and DMX control.

Instructions of RGB Light Wiring:
Yellow Wire Connects to Anode (+).
Red Wire Connects to the "R" Terminal, Cathode (-).
Green Wire Connects to the "G" Terminal, Cathode (-).
Blue Wire Connects to the "B" Terminal, Cathode (-).

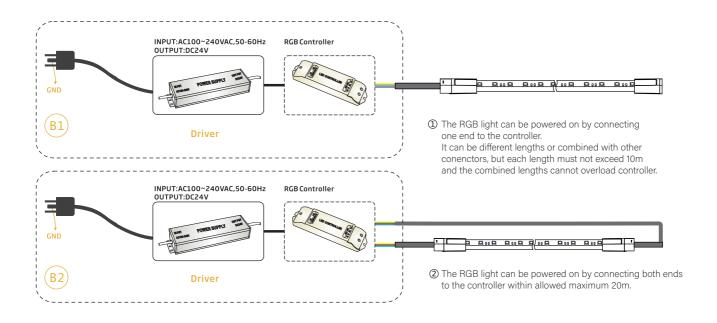




DIAGRAM OF LIGHT WIRING

3. Dynamic Light Wiring

Note:

- 1. This LED Neon Flex Ribbon must be used in conjunction with DC24V power supply.
- 2. Always observe proper polarity. Polarity symbols should match on each component.
- 3. Ensure to add 20% buffer when sizing power supply.
- 4. Ensure that the power cable carried current is no greater than 80% of its capacity.
- To minimise the voltage drop and keep light consistency, position power supply nearest to the power feed end of LED Neon Flex Ribbon and keep the power line as short as possible.
- 6. Compatible with RGB controller and DMX control.

Instructions of Dynamic Light Wiring:

Red Wire Connects to Anode (+).

Yellow Wire Connects to Low Colour Temperature Connection, Cathode (-)

Black Wire Connects to High Colour Temperature Connection, Cathode (-).

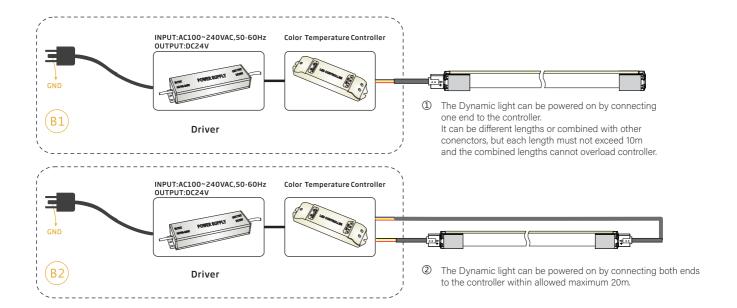






DIAGRAM LIGHT WIRING

4. RGBW Light Wiring

Note:

- 1. This LED Neon Flex Ribbon must be used in conjunction with DC24V power supply.
- 2. Always observe proper polarity. Polarity symbols should match on each component.
- 3. Ensure to add 20% buffer when sizing power supply.
- 4. Ensure that the power cable carried current is no greater than 80% of its capacity.
- To minimise the voltage drop and keep light consistency, position power supply nearest to the power feed end of LED Neon Flex Ribbon and keep the power line as short as possible.
- 6. Compatible with RGBW controller and DMX control.

Instructions of RGBW Light Wiring:
Yellow Wire Connects to Anode (+).
Red Wire Connects to the "R" Terminal, Cathode (-).
Green Wire Connects to the "G" Terminal, Cathode (-).
Blue Wire Connects to the "B" Terminal, Cathode (-).
White Wire Connects to the "W" Terminal, Cathode (-).

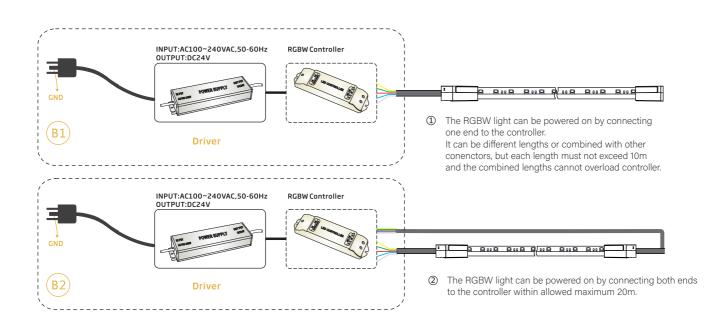




DIAGRAM LIGHT WIRING

5. Chasing Light WIring


Note:


- This LED Neon Flex Ribbon must be used in conjunction with a DC24V power supply and IC-UC2903 (2904) compatible controller
- Polarity symbols, GND, signal line connection should match on each component properly.
- Ensure to add 20% buffer when sizing power supply.
- Ensure that the power cable carried current is no greater than 80% of its capacity.
- To minimise the voltage drop and keep light consistency, position power supply nearest to the power feed end of LED Neon Flex Ribbon and keep the power line as short as possible.
- This Chasing Ribbon Light is one directional. The signal input direction is always indicated by an arrow marked on the side of light.

Instructions for Chasing Light Wiring: Red Wire Connects to the "VCC" or Anode (+) Terminal.

Yellow Wire Connects to the "Signal" Terminal.

Black Wire Connects to the "GND" or Cathode (-) Terminal.

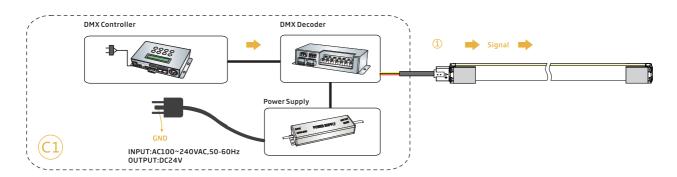

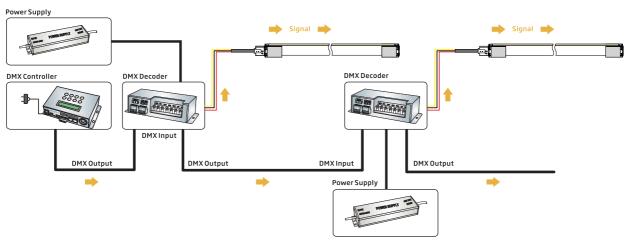

Note:


The Pixel Addressable Light series allows precise control of every cutting increment. To ensure IC chips receive strong control signals, please adhere to the parameters listed below.

- To ensure strong signal the 3-wire signal cable should not exceed 10m.
- For cable lengths longer than 10m, a signal amplifier must be used for strong signal transmission. Please ask our technical team for more details.





DIAGRAM LIGHT WIRING

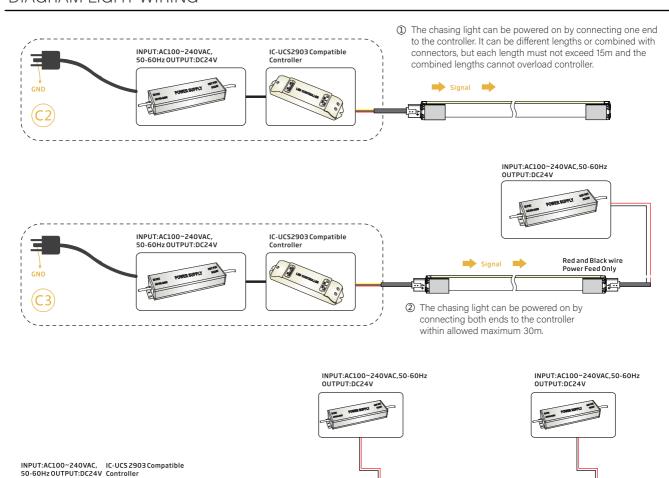

3 The chasing light can be powered on by series connecting to the controller within allowed maximum length.

The Pixel Addressable Light series allows precise control of every cutting increment. To ensure IC chips receive strong control signals, please adhere to the parameters listed below.

Use power T-Feed connector

- To ensure strong signal the 3-wire signal cable should not exceed 10m.
- For cable lengths longer than 10m, a signal amplifier must be used for strong signal transmission. Please ask our technical team for more details.



SWIVEL FRONT CONNECTOR


6. High Voltage Light Wiring



Part 1 Power Cable

Part 2 Extension

Part 3 Power connector & terminal

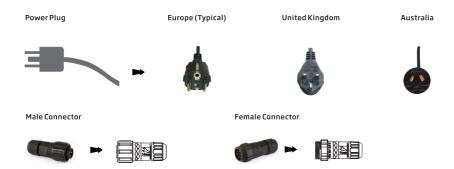

Part 1: Power Cable

High voltage power supply with fuse box for not UL listed light

Note: Please select the plug type based on your country electricity standard.

Part 1 can power Part 2 or Part 3 directly.

Part 2: Extension

With injection-moulded connectors on both ends, Part 2 can be used for light extension.

WWW.LEDCTRL.COM

Part 3: Power connector & terminal

Connect with Part 1 directly



TROUBLESHOOTING

The whole light doesn't work.

Check power supply is plugged, switched on and receiving power.

Check all light, dimmer or controller connections connection from the power supply to LED Neon Flex Ribbon.

Check polarity of all wire connections.

Make sure power supply output voltage is 24VDC

Check front connector is inserted into backside of PCB and properly assembled.

Light emitting appear dim or dull at one end.

Check whether the output voltage of the power supply is lower than that of light.

Adjust the dimming level to the maximum.

Power from both ends or shorten lighting length to prevent voltage drop.

Light emitting appear excessive brightness.

Check whether the output voltage power supply is higher than that of light.

Check whether the power grid is stable.

If the first segment doesn't work.

Cut not in indicated cutting line or not in a straight line. Cut out and remove the first segment.

Damage casued to the first LED when inserting the front connector to the right side of PCB. Cut out the first segment and properly assemble connector.

Water ingress due to poor connector assembly could cause a short circuit of first segment. Replace length with a new one. External impact damage inside LEDs. Only use your hands to install LED Neon Flex Ribbon into aluminium profile.

LED Neon Flex Ribbon is flashing on and off.

Check the power supply to ensure it supports the length you are using. Select the appropriate strength or install and additional power supply to support your installation.

Check power supply output voltage is stable.

Check front connector is properly installed with good contact with the copper PCB.

Check proper controller is connected for light working.







LIMITED WARRANTY

LEDCTRL® hereby warrants, to the original purchaser, LEDCTRL® finished products to be free of manufacturing defects in material and workmanship for a standard period of 5 year unless otherwise stated from the date of purchase, with an extended warranty available upon request. This warranty shall be valid only if the product is purchased from LEDCTRL⁴ Druing the warranty period, you are entitled to have the products repaired or replaced if the products fail to be of acceptable quality and damage occurred under normal use. It is the owner's responsibility to establish the date and warranty as acceptable evidence, at the time service is sought.

Warranty is applied by LEDCTRL®, LEDCTRL® retains the right to review the justification of the claim. The limited warranty is subjected to the following additional conditions:

- The product is properly handled, installed and maintained according to official latest instructions or manual of LEDCTRL® and applicable regulations and standards.
- Purchaser must notify LEDCTRL® in writing of a BD CORRECTIVE ACTION REPORT to specify the defect in question no later than 15 days after they were detected. Acceptance of the product shall not be denied on the grounds of insignificant defects. Claims for defects notified belatedly are excluded.

 c. A copy of the purchase invoice of the concerned products must be attached to submit to LEDCTRL*.
- The concerned products sample shall be returned back as required quantity to LEDCTRL® for inspection upon request and sent to the following address:

LEDCTRL® Warehouse 3/482 Balmain Rd Lilyfield, Sydney NSW, 2040 Australia

This is not a serive contract, and this warranty does not include maintenance, cleaning or periodic check-up. Parts not covered by this warranty include: fuses, external power supplies, third party items not manufactured by LEDCTRL®, accessories. During the period specified above, if any product covered by this limited warranty, LEDCTRL® determines to its satisfaction that such product failed to satisfy this warranty, LEDCTRL* will, at its own discretion, repair or replace the product or the defective part thereof.

For purpose of clarity, "repair or replace the product or the defective part thereof" does not include any removal or reinstallation costs or expenses, including, without limitation, any labor costs or expenses, shipping costs to return non-conforming products or any damages that may occur during the return of product to LEDCTRL*. A refund will not be provided for any warranty claim, but the purchaser may, at its discretion, require deducting the original purchase price of defective product or part from future purchase orders.

If LEDCTRL® chooses to replace the product and is not able to do so because it has been discontinued or is not available, LEDCTRL® may replace it with a comparable product. LEDCTRL® reserves the right to use new, reconditioned, refurbished, repaired, or remanufactured products or parts in the repair or replacement of any product covered by this limited warranty Please note that lighting properties of replacement products may differ from original product due to technical advancements and usage-related changes in the light flux and light colour.

The warranty period is neither extended nor renewed if the product is repaired or replaced by LEDCTRL®.

LEDCTRL® reserves the right to make changes in design and/or improvements upon its products without any obligation to include these changes in any products heretofore manufactured.

Exclusion of Warranty:

- a. Warranty period has expired.
- b. Legal proof-of-purchase invoice or PO numbers are not provided, or are reasonably believed to have been forged or tampered with.
- c. Damage caused by improper installation, wiring, storage, transportation, incorrect use, bending or operation not in accordance with the official latest instructions or manual.
- d. Damage caused by unauthorized modification, dissection, soldering, or any deliberate damage or losses.
- e. Damaged caused by the carrier-in-transit, which will be handled under separate terms (Purchaser's designated consignee is responsible for all freight claims; LEDCTRL* will be available to assist in such matters if proving forward service).
- f. Accessories or attachments to the product that are not supplied or approved by LEDCTRL® and led to the damage
- q. The products not used for the purpose for which designed or if any repairs, alterations or maintenance are made by any person not authorized by LEDCTRL®.
- h. Product silk printed serial numbers, crimped waterproof ring of strip lamps of tampering or removal.
- i. Conditions demonstrating misapplication, under/over voltage situations, extreme environmental conditions beyond those defined in the product specification
- j. Abrasions and natural appearance variations (i.e. dusty, fouling, etc.) that do not affect the function of the product. k. Direct or indirect losses caused by force majeure (i.e. vandalism, natural disaster, warface, acts of terrorism, riots, fire, explosion, etc.).

Freight

Transportation cost for return product will be carriage paid (at the cost of the claimant). If the product was found to be defective after inspection, LEDCTRL® will reimburse the freight cost by deducting it from future order and bear the cost of replacement or repaired product delivery. If the product was found not to be defective or exclusion of warranty, the claimant shall bear all the return expenses, and may be required to re-purchase the product if it requires replacement.

All products covered by this warranty were manufactured after January 1, 2025 and bear identifying code on the product itself. This warranty is the only written warranty applicable to LEDCTRL® Lighting Products supersedes all prior warranties and written descriptions of warranty terms and conditions heretofore published.

LED CTRL, 1/483 BALMAIN


LILYFIELD, NSW 2040, AUSTRALIA





APPENDIX

1. Part Number Configuration

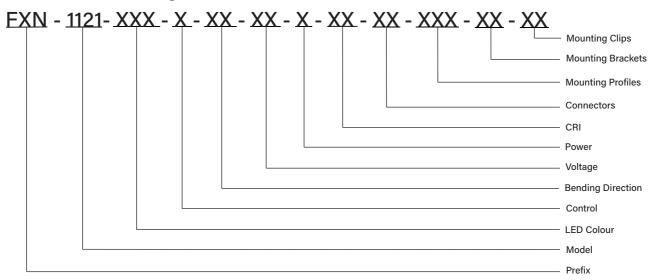

2. Correlated Colour Temperatue (CCT)

ANSI STANDARD

Nominal CCT Categories

(2200-6500K)

Nominal CCT	Target CCT and tolerance(K)	Target D _{uv}	D _{uv} Tolerance Range
2200K	2238 ±102	0.0000	Tx:CCT of the source
2500K	2460±120	0.0000	For Tx < 2870K
2700K	2725 ±145	0.0000	0.000±0.0060
3000K	3045±175	0.0001	For Tx≥2870K
3500K	3465±245	0.0005	Duv(Tx)±0.0060
4000K	3985±275	0.0010	where
4500K	4503±243	0.0015	Duv(Tx)=57700 x (1/Tx)2
5000K	5029±283	0.0020	-44.6 x (1/Tx)
5700K	5667±355	0.0025	+0.00854
6500K	6532±510	0.0031	
Flexible CCT	$T_F^{1)} \pm \Delta T^{2)}$	D _{uv} T _F ³⁾	

Remark

For Example - FXN - 1121 - RGBW(27K) - X - VB - 24 - 6 - 80 - SLC - AP - PV - CMC

- T_r is chosen to be at 100K steps
 (2300,2400,.....,6400K),excluding
 the ten nominal CCTs listed in Table 1.
- 2) \(\Delta T = 1.1900 \text{x} 10^4 \text{x} T^2 + 0.7168 \text{x} T 902.55 \)
 3) Same as in the D_{uv} Tolerance Range.
- 3. Chart of Recommended Feed Cable Length According to Power Consumption

This chart only applicable to input voltage of 24V DC

WattS of Light	22AWG/0. 34mm ²	20AWG/0. 53mm ²	18AWG/0. 82mm ²	17AWG/1. 04mm ²	16AWG/1. 38mm ²	14AWG/2. 07mm ²	12AWG/3. 29mm ²	10AWG/5. 62mm
10W	36m	60m	100m	120m	140m	240m	400m	600m
20W	18m	30m	50m	60m	70m	120m	200m	300m
30W	12m	20m	30m	38m	45m	80m	130m	200m
40W	8m	15m	22m	28m	35m	60m	95m	140m
50W	6m	12m	18m	22m	28m	48m	75m	105m
60W	5m	10m	15m	18m	22m	36m	60m	88m
70W	/	8m	12m	14m	18m	30m	50m	72m
80W	/	6m	10m	11m	14m	24m	40m	58m
90W	/	4m	7m	8m	10m	18m	30m	45m
100W	/	/	5m	6m	7m	12m	22m	32m
110W	/	/	3m	4m	5m	8m	15m	22m
120W	/	/	2m	2.5m	3m	Om	8m	12m

Note:

- 1. Please adhere to parameters in below chart, feed cable length longer than what specified here will create voltage drop and eventually affect the lumen output of light.
- 2. The 0.3m feed cable length attached to front connector is not included in this chart.
- 3. Feed cable length over 10m is NOT recommended unless special circumstance, especially for pixel addressable lights.





LOADING CHART

Loading Chart

Туре.	Rated Power /mtr	Power Supply											
		35w	60w	75w	80w	100w	120w	150w	120w	150w	185w	240w	320w
	6.5w/7.2w/8w	3m	6m	7.5m	8m	10m	12m	15m			18m	24m	30m
FXN 1121	10.6w/11w/12w	2m	3.5m	4.5m	5m	6m	7m	10m			12m	14m	20m
	15w	2m	3m	4m	4.2m	5m			6m	8m	10m		
Energising Way			DC inp	out — (170	12				DC input	01	*	02	DC input

Note:

- These are the light maximum recommended running length subject to selected power supply.

 For example: it is recommended to use one 80W power supply loading maximum 8m light (7.2w/m) or maximum 5m light (12w/m) by energising the light one end.